

WATER



# WATER

---

## Legend

Codes indicated with numbers:

**11xxx.1** supplied with G 3/8" coupling

**11xxx.2** supplied with G 1/2" coupling

**11xxx.3** supplied with G 3/4" coupling

1. To require chemical nickel plating add NK to the article's code  
**ex. 11001.1NK**

2. To require ceramics water head valve (1/4 turn) add C to the article's code  
**ex. 11001.1C**

## Technical Information

Water taps can be supplied with oil bath head valve and sealing in EPDM or with ¼ turn ceramics head valve.

Maximum working pressure 10 Bar.

Nozzle with possibility of disassembly in compliance with DIN 12898 regulation.

Handles in compliance with EN13792:2000 norm, manufactured in acid - resistant PP.

Threads in compliance with ISO228/1 regulation, B tolerance class.

Taps are built following the DIN12918 norm.

FAR can furthermore supply for demineralised water all the series with an internal chemical nickel-plating with a thickness of 17 microms, to have the desired article with this treatment the customer just needs to add to the article the NK abbreviation.

For ultra pure waters FAR manufactures PP and PVDF taps with recirculation.

Maximum working pressure 6 Bar.

Taps finished with acid-resistant epoxy powder painting.

# WATER

# 11000.1

## STRAIGHT TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

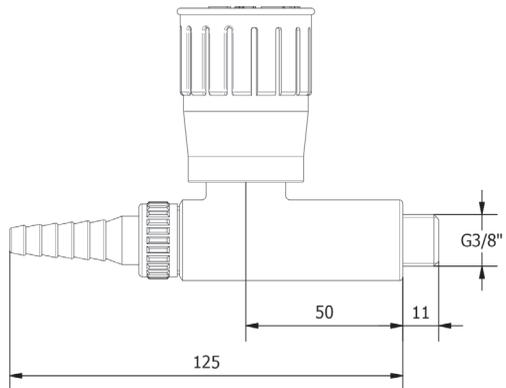

### WEIGHT:

- 459 gr

WARRANTY 2 YEARS

# WATER

# 11001.1

90° TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

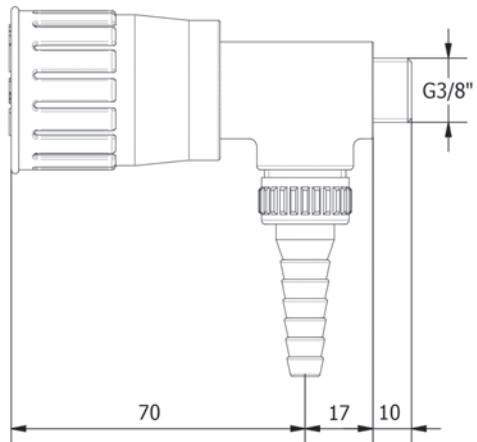

### WEIGHT:

- 592 gr

WARRANTY 2 YEARS

# WATER

# 11002.1

## WALL MOUNTED TAP 90° NOZZLE WITH INCLINED HANDLE

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 334 gr

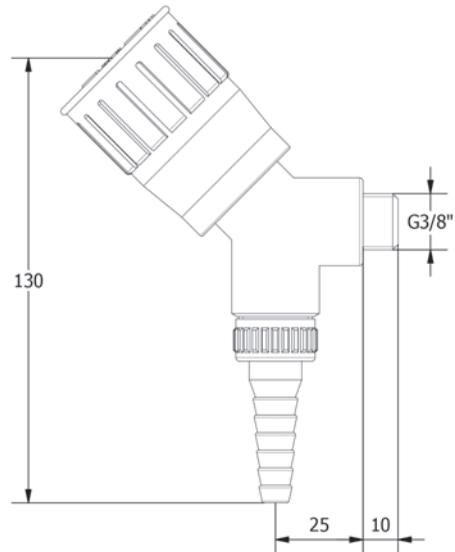

WARRANTY 2 YEARS

## WALL MOUNTED TAP 45° NOZZLE WITH INCLINED HANDLE

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 372 gr

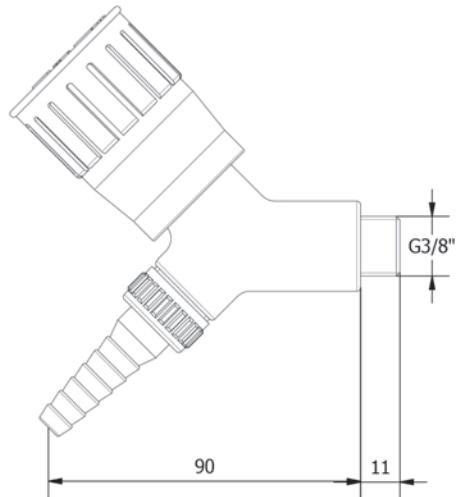

WARRANTY 2 YEARS

# WATER

# 11010.1

## STRAIGHT TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

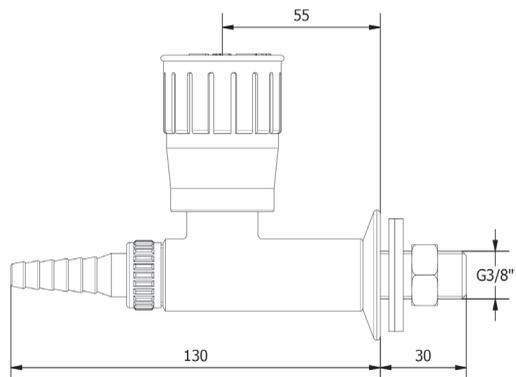

### WEIGHT:

- 592 gr

WARRANTY 2 YEARS

# WATER

# 11011.1

## WALL MOUNTED TAP 45° NOZZLE WITH INCLINED HANDLE

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 536 gr

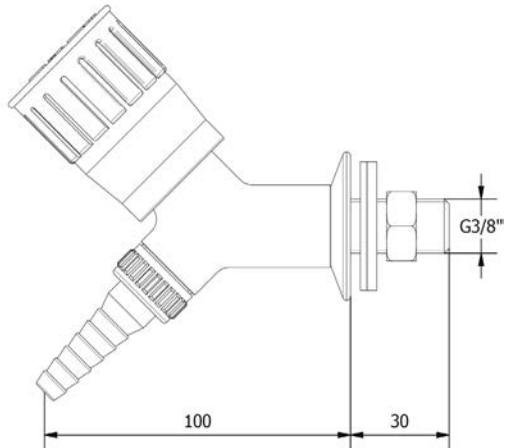

WARRANTY 2 YEARS

# WATER

# 11012.1

## WALL MOUNTED TAP 90° NOZZLE

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

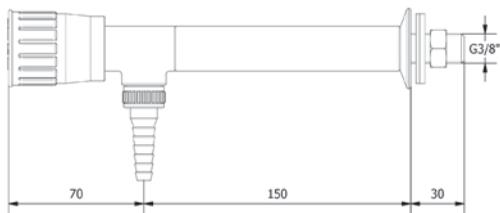

### WEIGHT:

- 536 gr

WARRANTY 2 YEARS

# WATER

# 11012.1PP

## WALL MOUNTED 90° PP TAP

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle and internal lining in PP

### HEADWORK SEALING:


- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

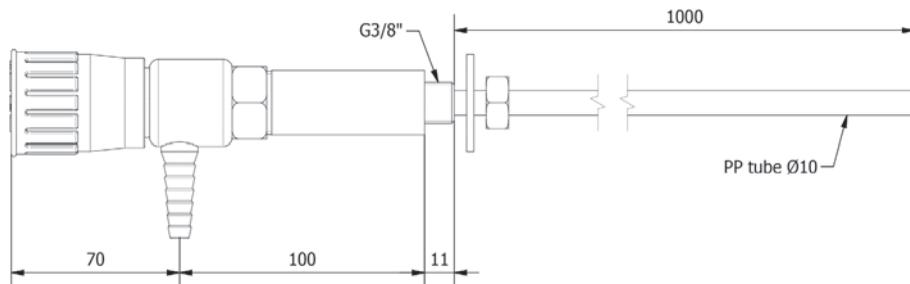

### WEIGHT:

- 405 gr

WARRANTY 2 YEARS

# WATER

# 11013.1

## WALL MOUNTED 90° TAP WITH VACUUM BREAKER

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

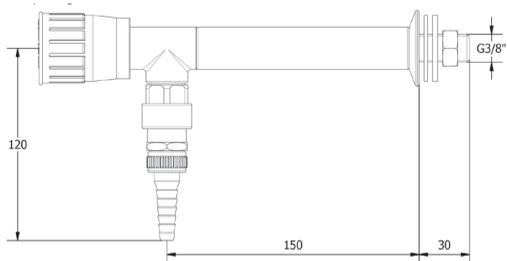

### WEIGHT:

- 1006 gr

WARRANTY 2 YEARS

## WALL MOUNTED U-TAP WITH NOZZLE 90°

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1391 gr

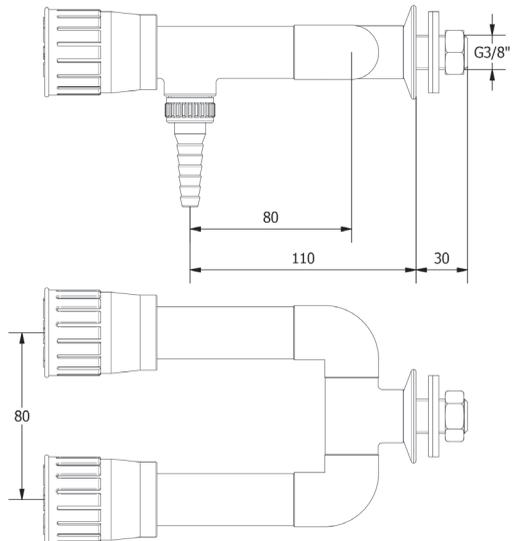

WARRANTY 2 YEARS

# WATER

# 11016.1

## WALL MOUNTED T-TAP WITH NOZZLE 90°

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:



- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1509 gr

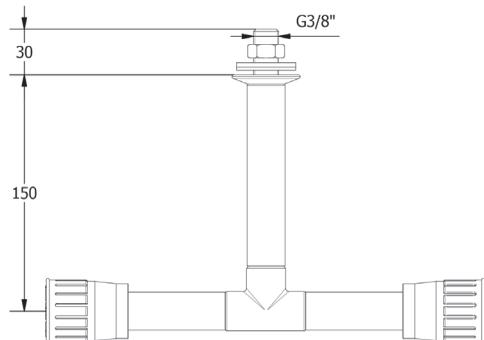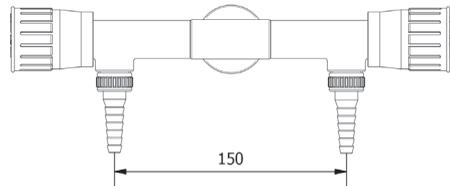

WARRANTY 2 YEARS

# WATER

# 11018.1

## WALL MOUNTED Y-TAP WITH NOZZLE 90°

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:



- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1549 gr

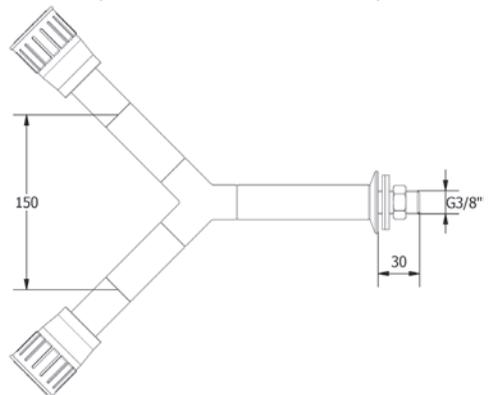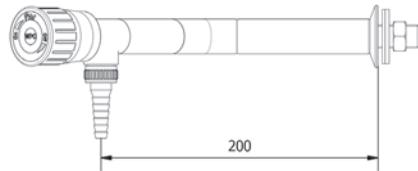

WARRANTY 2 YEARS

# WATER

# 11019.1

## VERTICAL T-TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

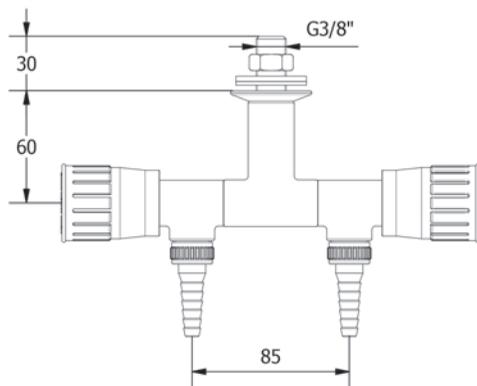

### WEIGHT:

- 1163 gr

WARRANTY 2 YEARS

# WATER

# 11020.1

## VERTICAL U-TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1562 gr

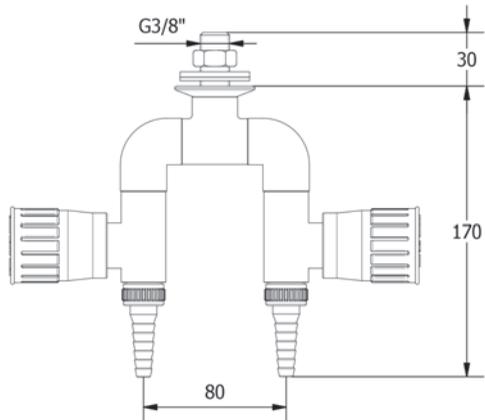

WARRANTY 2 YEARS

# WATER

# 11021.1

## VERTICAL U-TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

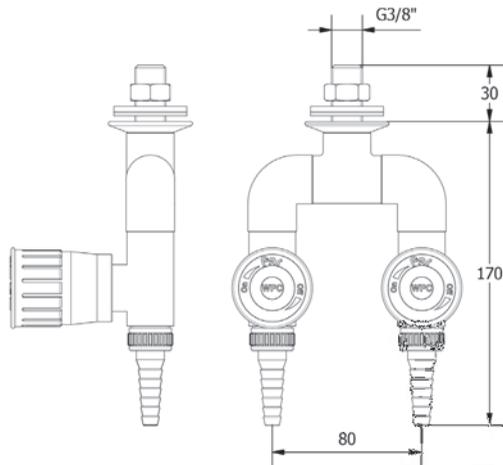

### WEIGHT:

- 1566 gr

WARRANTY 2 YEARS

# WATER

# 11022.1

## VERTICAL U-TAP

### APPLICATION:

- Vertical mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

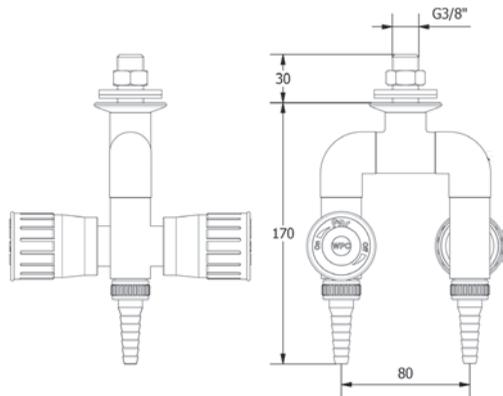

### WEIGHT:

- 1566 gr

WARRANTY 2 YEARS

# WATER

# 11023.1

## VERTICAL Y-TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

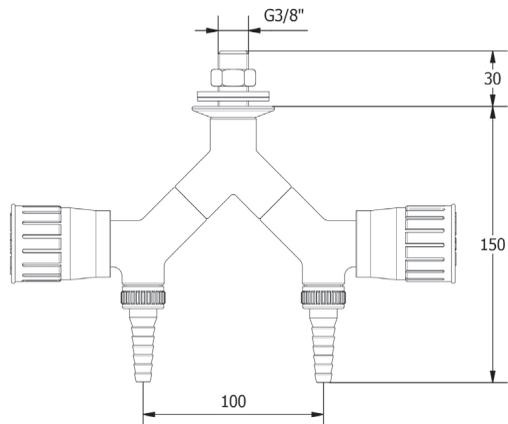

### WEIGHT:

- 1306 gr

WARRANTY 2 YEARS

# WATER

# 11030.1

## WALL MOUNTED TAP WITH "S" SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

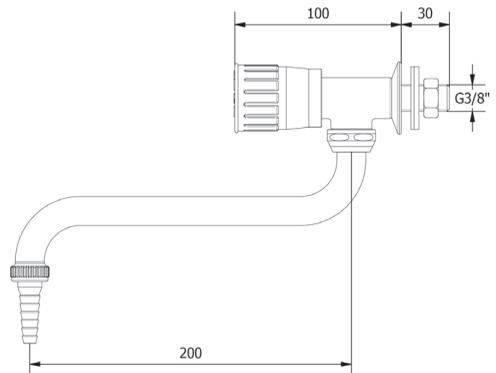

### WEIGHT:

- 654 gr

WARRANTY 2 YEARS

# WATER

# 11031.1

## WALL MOUNTED TAP WITH "U" SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

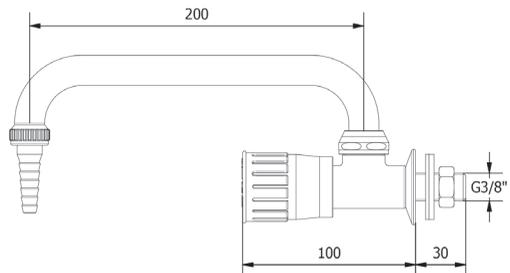

### WEIGHT:

- 699 gr

WARRANTY 2 YEARS

# WATER

# 11033.1

## WALL MOUNTED TAP WITH SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 655 gr

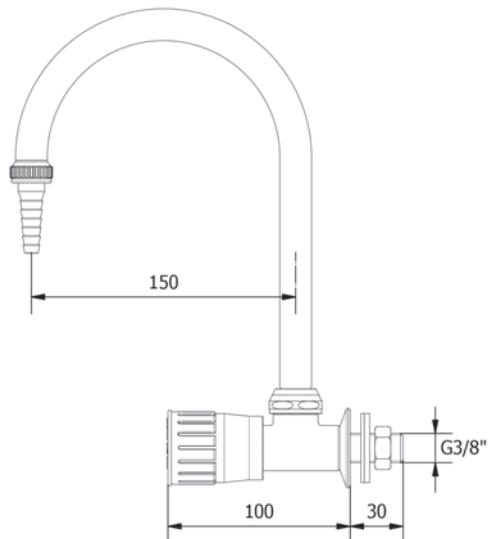

WARRANTY 2 YEARS

# WATER

# 11034.1

## 3-WAY WALL MOUNTED FITTING WITH SWIVELLING GOOSENECK SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 30l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

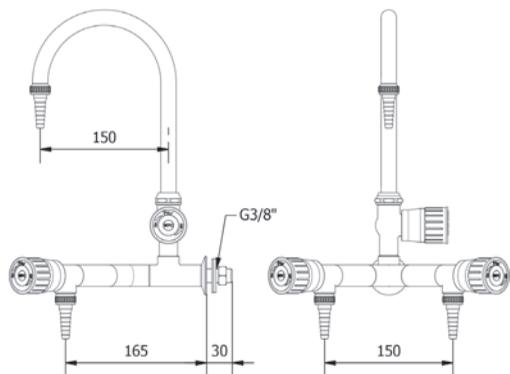

### WEIGHT:

- 2524 gr

WARRANTY 2 YEARS

# WATER

# 11035.0

## WALL MOUNTED ONE HOLE MIXER WITH SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 20l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Copper tubes  $\varnothing 10$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

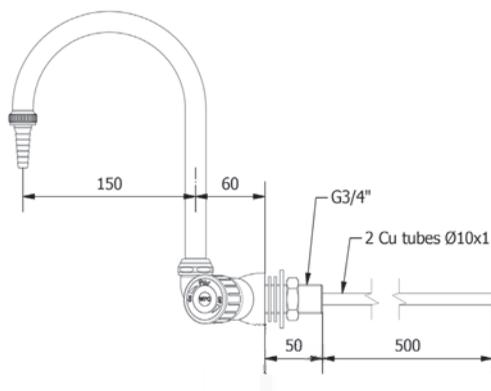

### WEIGHT:

- 1532 gr

WARRANTY 2 YEARS

# WATER

# 11036.0

## WASH BASIN MIXER WITH U-SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G1/2"

### STANDARD AND NORMS:



- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1218 gr

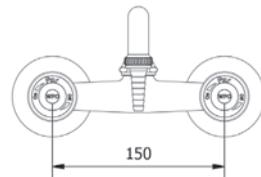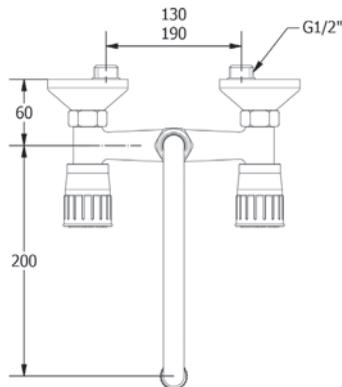

WARRANTY 2 YEARS

# WATER

# 11037.0

## WASH BASIN MIXER WITH S-SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1218 gr

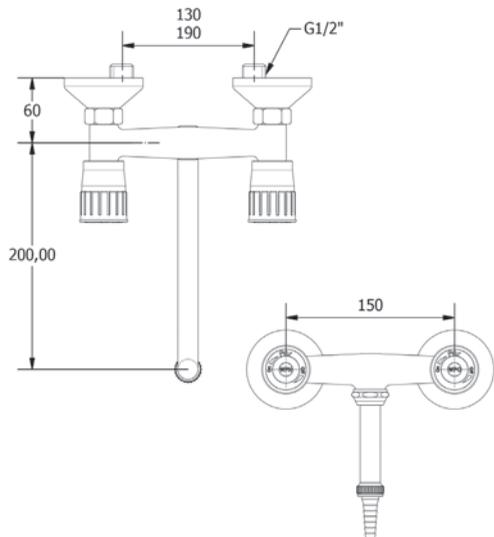

WARRANTY 2 YEARS

# WATER

# 11038.1

## VERTICAL WATER MIXER

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

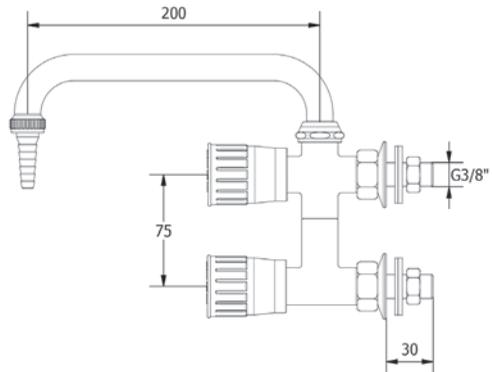

### WEIGHT:

- 1492 gr

WARRANTY 2 YEARS

# WATER

# 11039.1

## WALL MOUNTED VERTICAL MIXER WITH S-SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1447 gr

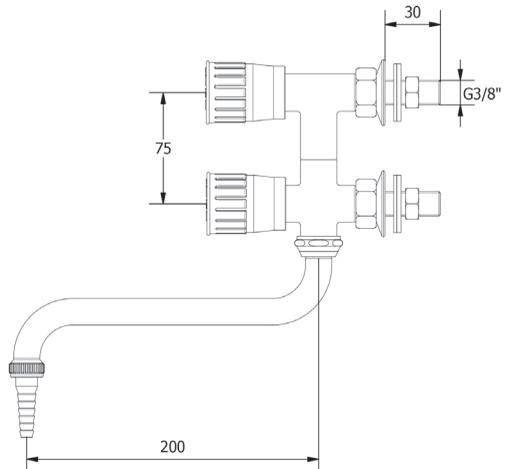

WARRANTY 2 YEARS

# WATER

# 11040.1

## MIXER WITH CLINICAL LEVER AND AERATOR

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:

- CERAMIC kartridge temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Spout measure 250-300

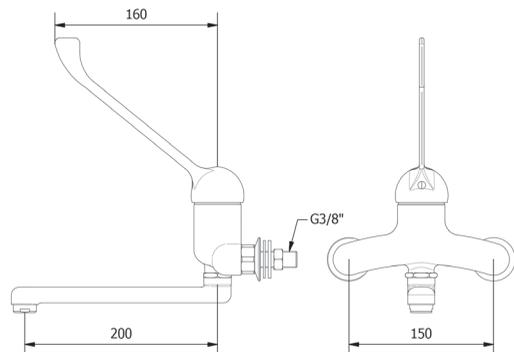

### WEIGHT:

- 2115 gr

WARRANTY 2 YEARS

## BENCH FITTING WITH 1 COLUMN STANDOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1087 gr

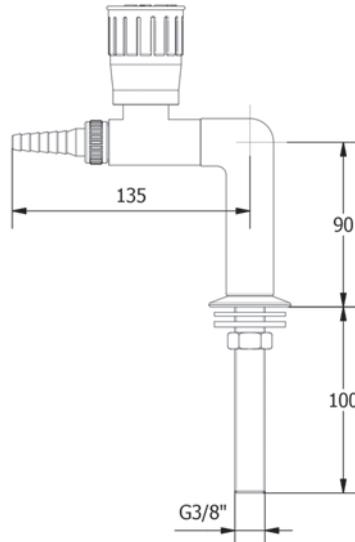

WARRANTY 2 YEARS

# WATER

# 11061.1

## 180° DOUBLE BENCH TAP

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1530 gr

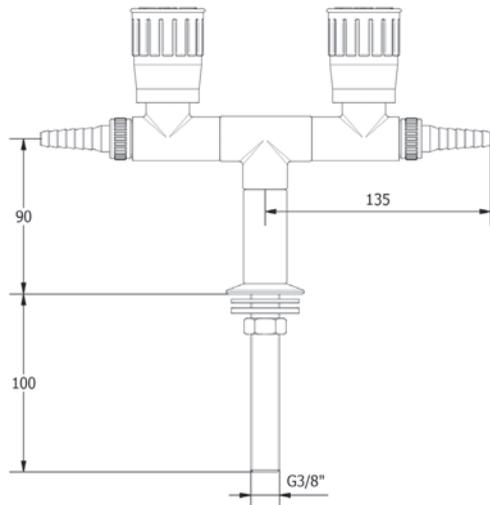

WARRANTY 2 YEARS

## BENCH "L" COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1956 gr

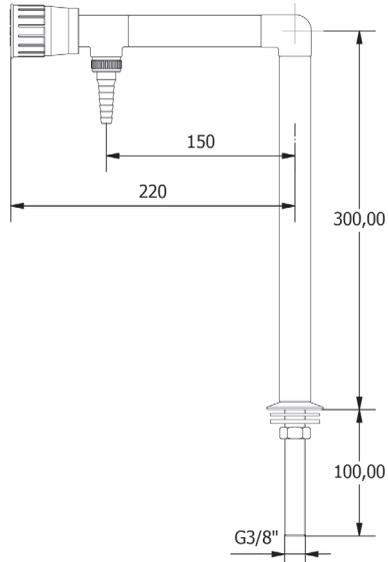

WARRANTY 2 YEARS

# WATER

# 11063.1

## BENCH "T" COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 2704 gr

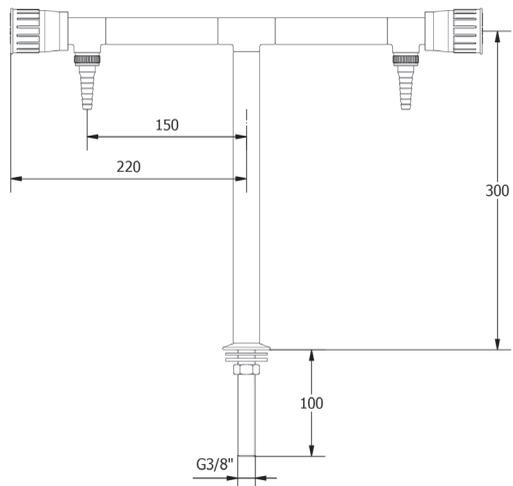

WARRANTY 2 YEARS

## BENCH "T" COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 2983 gr

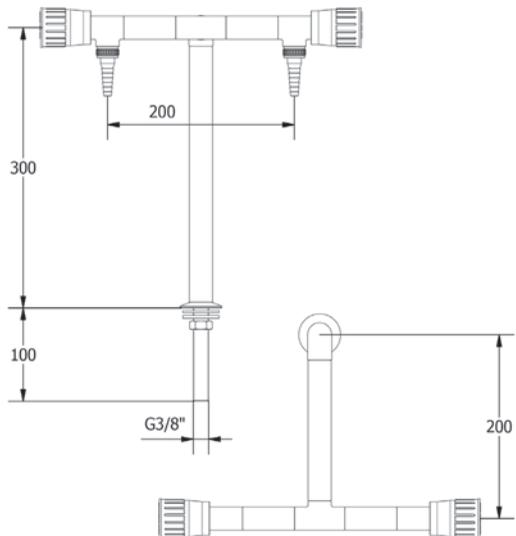

WARRANTY 2 YEARS

# WATER

# 11065.1

## BENCH "V" COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 2935 gr

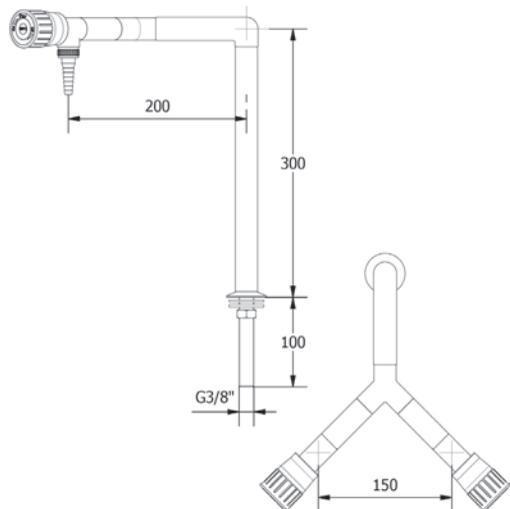

WARRANTY 2 YEARS

# WATER

# 11066.1

## BENCH "U" COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 3358 gr

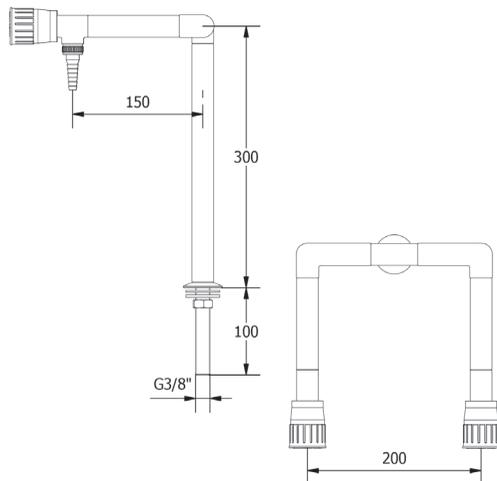

WARRANTY 2 YEARS

# WATER

# 11067.1

## BENCH MOUNTED 3 WAY COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 40l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 4104 gr

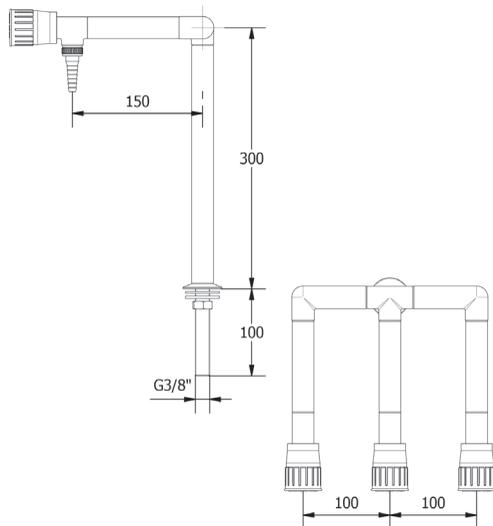

WARRANTY 2 YEARS

# WATER

# 11068.1

## BENCH MOUNTED 3 WAY COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 40l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 4770 gr

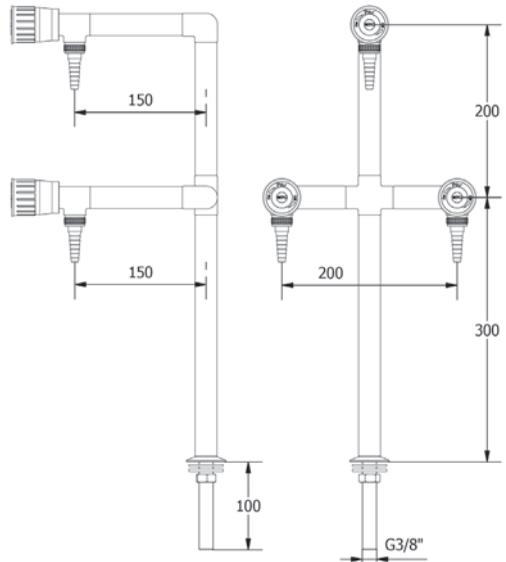

WARRANTY 2 YEARS

# WATER

# 11069.1

## BENCH MOUNTED 3 WAY COLUMN WITH SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 40l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 3949 gr

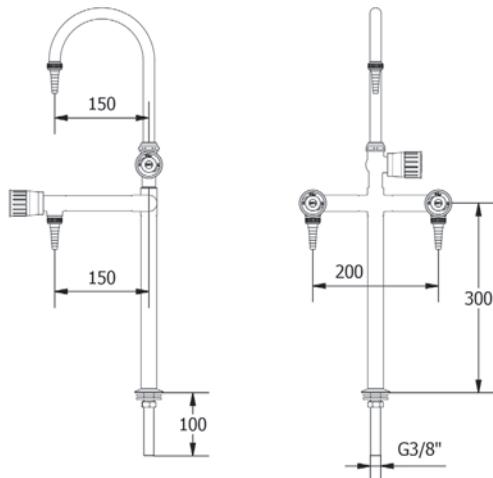

WARRANTY 2 YEARS

# WATER

# 11070.1

## COLUMN WITH "S" SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1760 gr

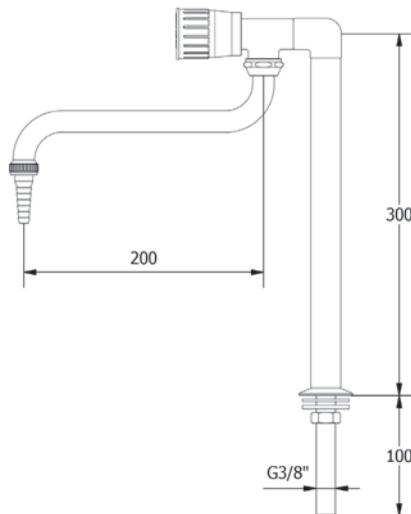

WARRANTY 2 YEARS

# WATER

# 11071.1

## COLUMN WITH "U" SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1804 gr

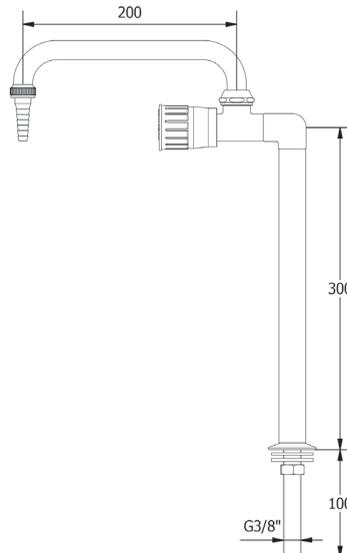

WARRANTY 2 YEARS

## UNDERTABLE WATER OUTLET TAP

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°

### CONNECTION TAP:

- Compressing dive for tube  $\varnothing 10$

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1028 gr

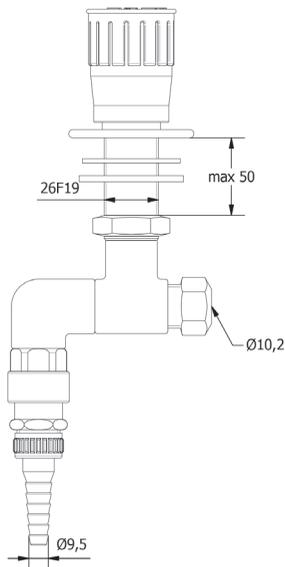

WARRANTY 2 YEARS

# WATER

# 11080.1

## BENCH COLUMN WITH GOOSENECK SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 927 gr

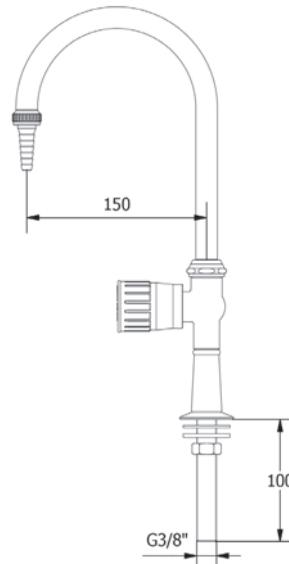

WARRANTY 2 YEARS

# WATER

# 11080.1CL

## BENCH COLUMN SWIVELLING SPOUT WITH LEVER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 927 gr

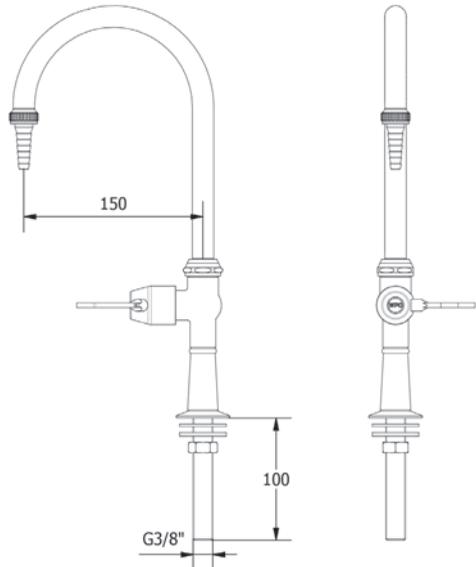

WARRANTY 2 YEARS

# WATER

# 11080.1FL

## BENCH COLUMN WITH GOOSENECK LEFT FIXED SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 927 gr

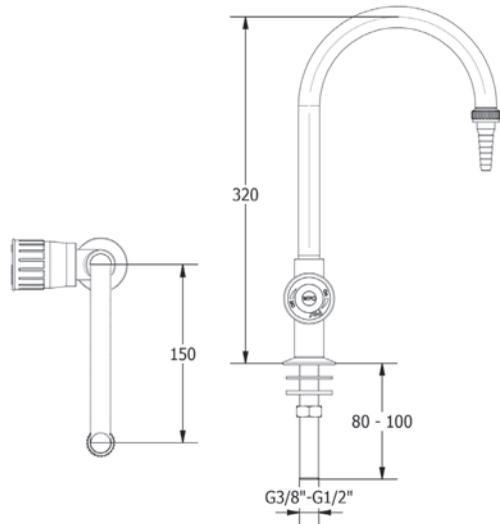

WARRANTY 2 YEARS

# WATER

# 11080.1FR

## BENCH COLUMN WITH GOOSENECK RIGHT FIXED SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 927 gr

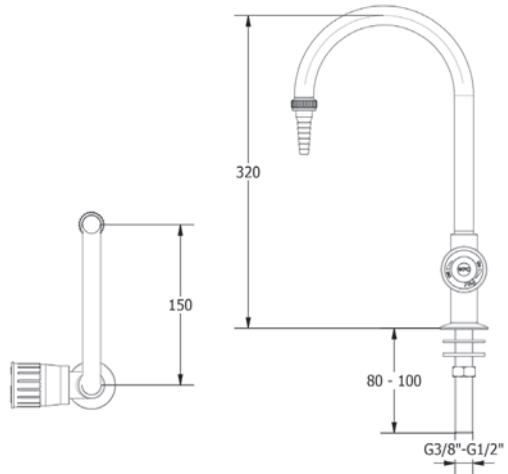

WARRANTY 2 YEARS

# WATER

# 11080.1FS

## BENCH COLUMN WITH GOOSENECK STRAIGHT FIXED SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 927 gr

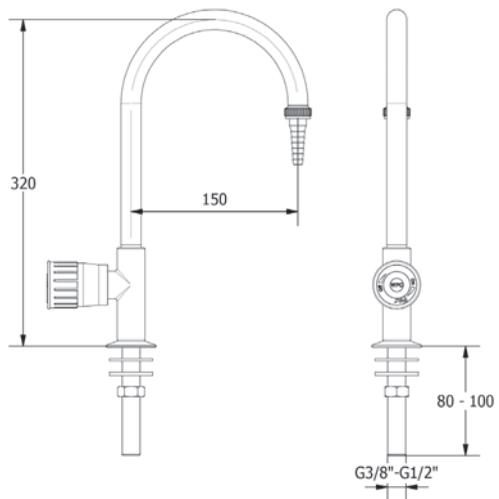

WARRANTY 2 YEARS

## BENCH MOUNTED ONE HOLE MIXER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Copper tubes  $\varnothing 10$

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1465 gr

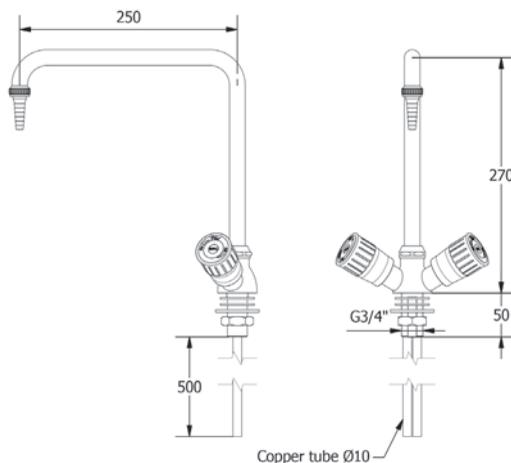

WARRANTY 2 YEARS

# WATER

# 11081.FLX

## ONE HOLE MIXER WITH FIXING SET AND FLEXIBLES

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Female G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

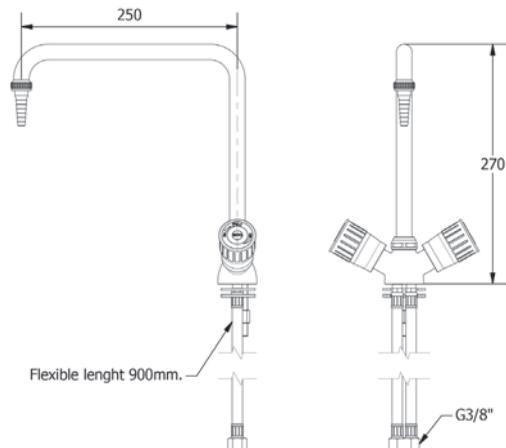

### WEIGHT:

- 1250 gr

WARRANTY 2 YEARS

# WATER

# 11082.3

## BENCH MOUNTED ONE HOLE MIXER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Copper tubes  $\varnothing 10$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

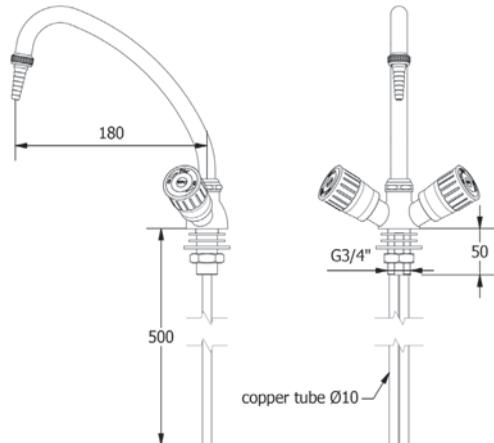

### WEIGHT:

- 1399 gr

WARRANTY 2 YEARS

# WATER

# 11083.1

## BENCH MOUNTED MIXER WITH "U" SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

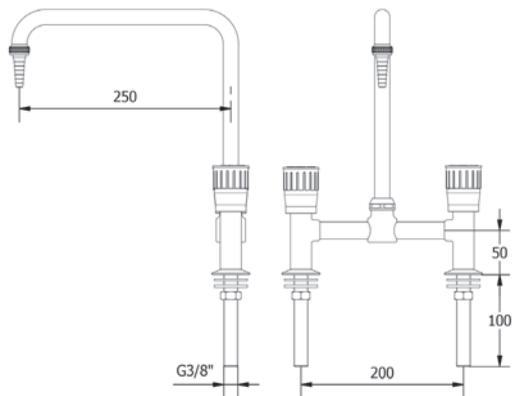

### WEIGHT:

- 2090 gr

WARRANTY 2 YEARS

# WATER

# 11084.1

BENCH MOUNTED MIXER WITH "U" SWIVELLING SPOUT, WITH FRONTAL HANDLES

**APPLICATION:**

- Bench mounting

**DETAILS:**

- Waterflow around 34l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

**SURFACE PROTECTION:**

- Epoxy powder coating RAL 7035

**MATERIALS:**

- Brass
- Handle in PP

**HEADWORK SEALING:**

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

**CONNECTION TAP:**


- Male thread G3/8" - G1/2"

**STANDARD AND NORMS:**

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

**OPTIONS:**

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

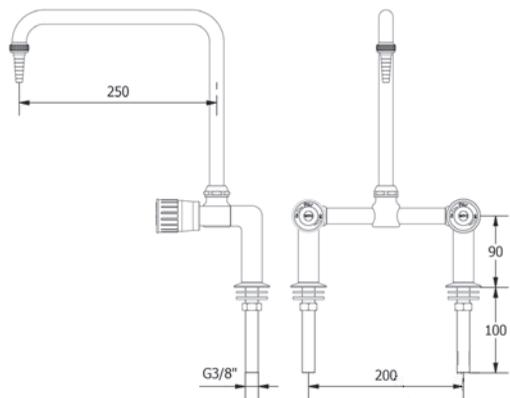

**WEIGHT:**

- 2710 gr

WARRANTY 2 YEARS

# WATER

# 11085.3

## BENCH MOUNTED LOW PRESSURE ONE HOLE MIXER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Copper tubes  $\varnothing 8$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

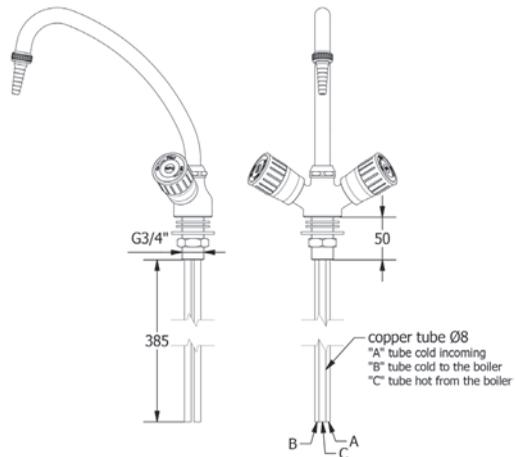

### WEIGHT:

- 1493 gr

WARRANTY 2 YEARS

## BENCH MOUNTED ONE HOLE MIXER WITH CLINICAL LEVER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:

- CERAMIC cartridge temperature working range: 0-70°

### CONNECTION TAP:


- Copper tubes

### STANDARD AND NORMS:

- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

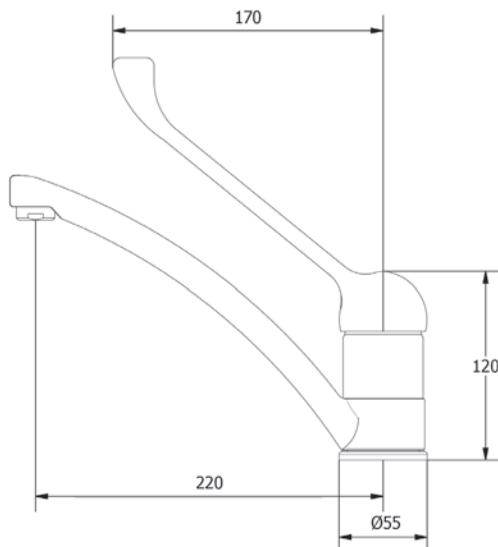

### WEIGHT:

- 1834 gr

WARRANTY 2 YEARS

# WATER

# 11087.0

## ONE HOLE MIXER WITH LEVER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:

- CERAMIC cartridge temperature working range: 0-70°

### CONNECTION TAP:


- Copper tubes

### STANDARD AND NORMS:

- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

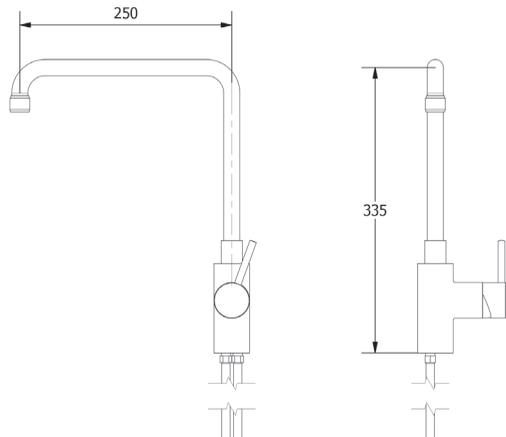

### WEIGHT:

- 1834 gr

WARRANTY 2 YEARS

# WATER

# 11088.0

## BENCH MOUNTED ONE HOLE MIXER WITH EXTRACTABLE HANDSHOWER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:



- EPDM temperature working range: 0-70°

### CONNECTION TAP:

- Copper tubes  $\varnothing 10$  - G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

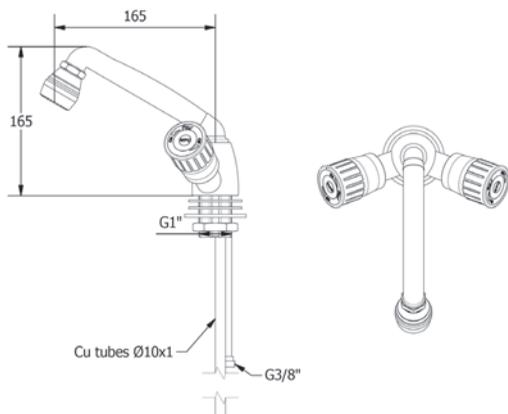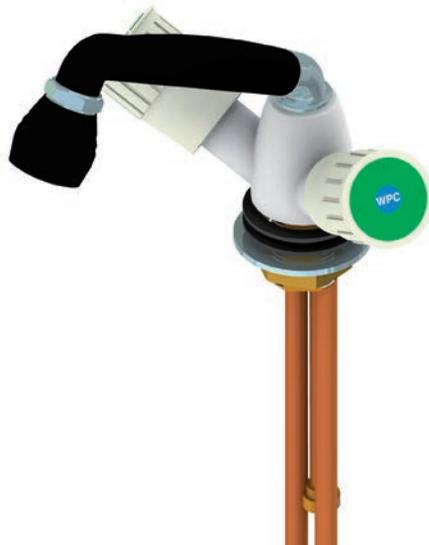

### WEIGHT:

- 2047 gr

WARRANTY 2 YEARS

# WATER

# 11089.0

## BENCH MOUNTED PUSH LEVER EXTRACTABLE HANDSHOWER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 1 Bars pressure
- Test pressure: 1 Bars/air
- Max working pressure: 1,5 Bars

### SURFACE PROTECTION:

- Chromium plating

### MATERIALS:

- Brass
- ABS

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°

### CONNECTION TAP:


- G3/8"

### STANDARD AND NORMS:

- DIN12918
- ISO228/1

### WEIGHT:

- 1857 gr

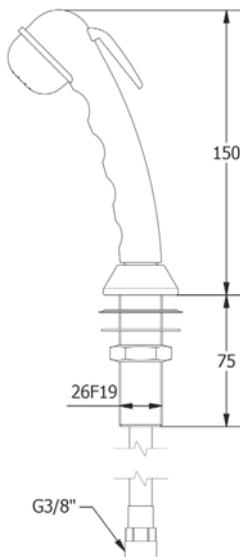

WARRANTY 2 YEARS

## BENCH MOUNTED PUSH LEVER EXTRACTABLE HANDSHOWER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:

- CERAMIC cartridge temperature working range: 0-70°

### CONNECTION TAP:


- Flexibles

### STANDARD AND NORMS:

- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

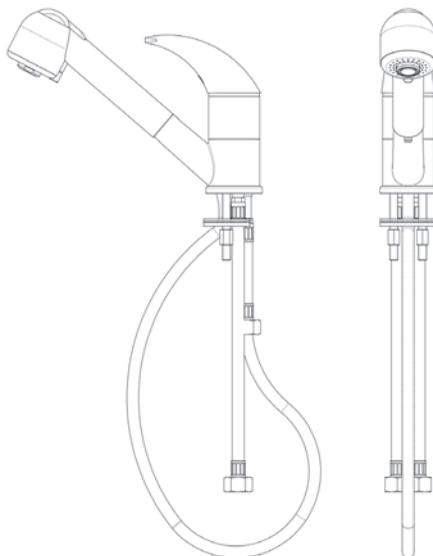

### WEIGHT:

- 1834 gr

WARRANTY 2 YEARS

# WATER

# 11100.3

MIXER WITH CLINICAL LEVER AND STAND ON COLUMN

## APPLICATION:

- Bench mounting

## DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass

## HEADWORK SEALING:

- CERAMIC cartridge temperature working range: 0-70°

## CONNECTION TAP:


- Copper tubes  $\varnothing 8$

## STANDARD AND NORMS:

- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

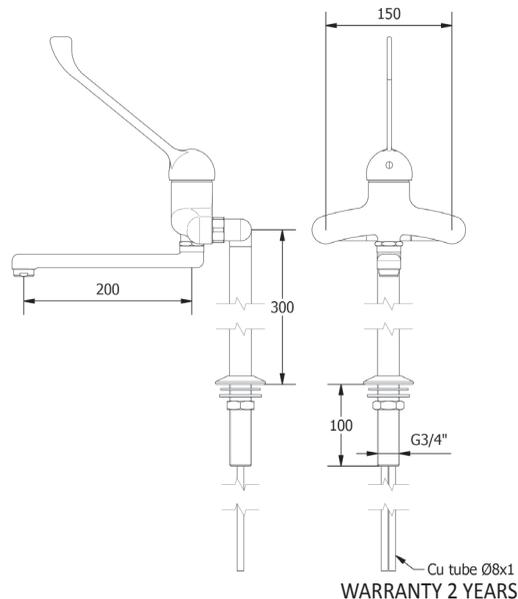

## WEIGHT:

- 4180 gr

# WATER

# 11101.3

## COLUMN WITH 1 TAP AND MIXER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC cartridge temperature working range: 0-70°

### CONNECTION TAP:

- Copper tubes  $\varnothing 8$

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 5519 gr

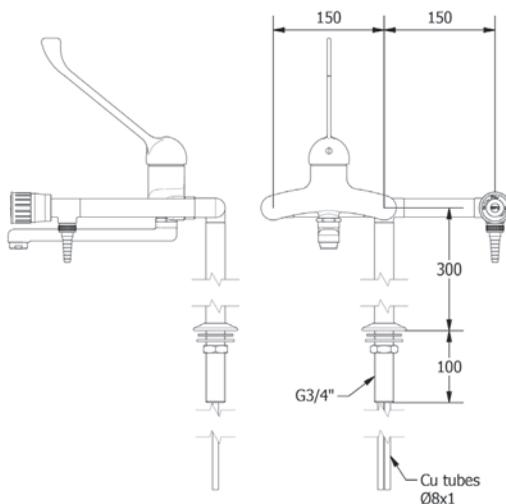

WARRANTY 2 YEARS

# WATER

# 11103.1

## BENCH MOUNTED DOUBLE LEG MIXER WITH S SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

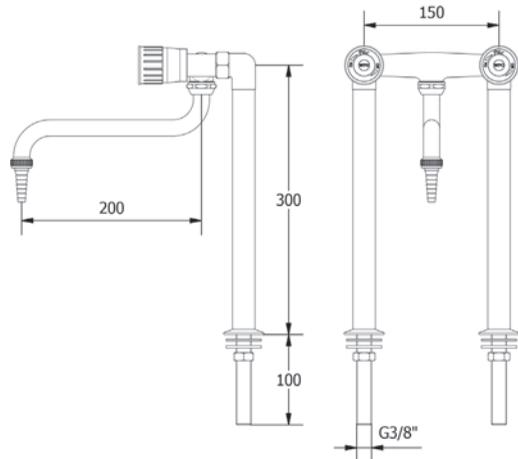

### WEIGHT:

- 3581 gr

WARRANTY 2 YEARS

# WATER

# 11104.1

## BENCH MOUNTED DOUBLE LEG MIXER WITH U SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 3626 gr

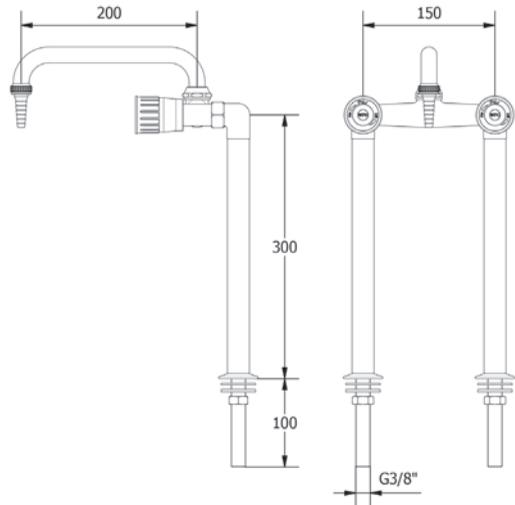

WARRANTY 2 YEARS

# WATER

# 11105.3

## BENCH MOUNTED ONE LEG MIXER WITH S SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/4" - Copper tubes  $\varnothing 8$

### STANDARD AND NORMS:



- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 3320 gr

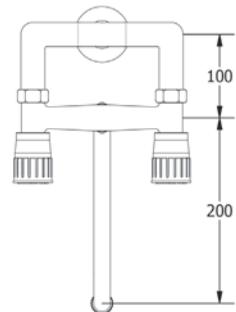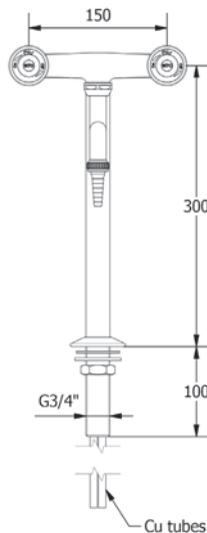

WARRANTY 2 YEARS

# WATER

# 11106.3

## BENCH MOUNTED ONE LEG MIXER WITH U SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/4" - Copper tubes Ø8

### STANDARD AND NORMS:



- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

### WEIGHT:

- 3365 gr

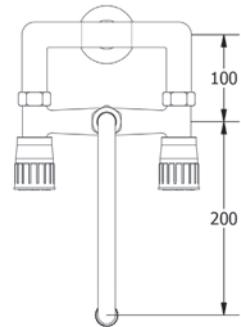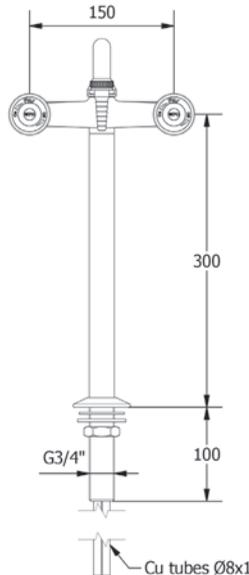

WARRANTY 2 YEARS

# WATER

# 11107.3

## BENCH MOUNTED ONE LEG DOUBLE MIXER WITH U SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/4" - Copper tubes  $\varnothing 8$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

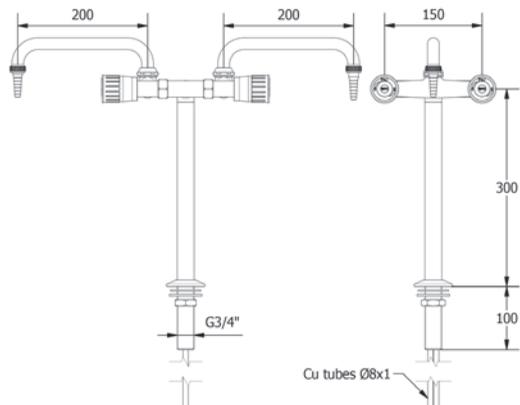

### WEIGHT:

- 4187 gr

WARRANTY 2 YEARS

# WATER

# 11108.3

## COLUMN WITH 1 TAP AND MIXER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/4" - Copper tubes  $\varnothing 8$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

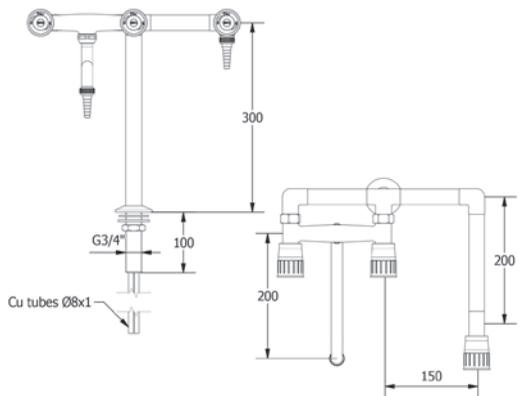

### WEIGHT:

- 4408 gr

WARRANTY 2 YEARS

# WATER

# 11109.3

## COLUMN WITH 1 TAP AND MIXER

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 26l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Malethread G3/4" - Copper tubes  $\varnothing 8$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

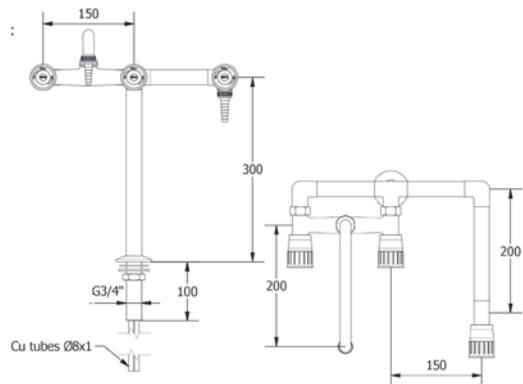

### WEIGHT:

- 4453 gr

WARRANTY 2 YEARS

## WALL ELBOW OPERATED TAP

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:

- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

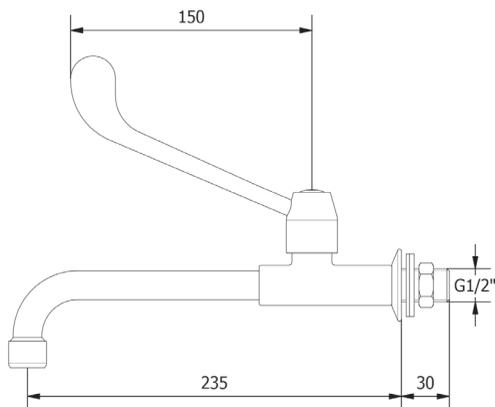

### WEIGHT:

- 902 gr

WARRANTY 2 YEARS

# WATER

# 11223.1

## BENCH ELBOW OPERATED TAP FOR COLUMN

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:

- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" or 1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1951 gr

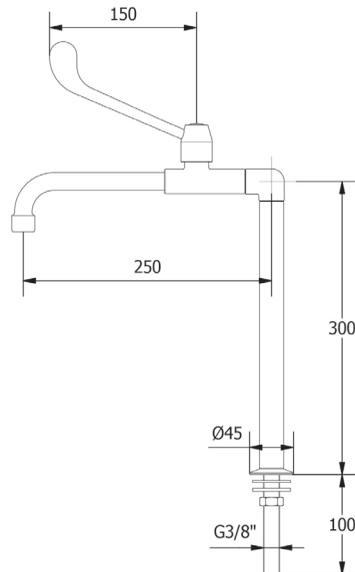

WARRANTY 2 YEARS

# WATER

# 11240.1

DOUBLE GOOSENECK BENCH MOUNTED WITH STOP-COCK

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 2396 gr

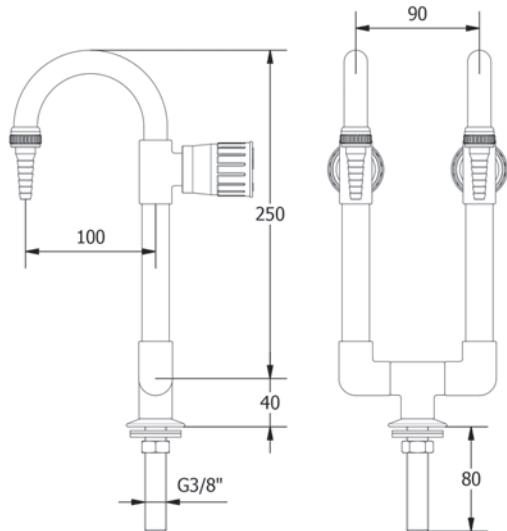

WARRANTY 2 YEARS

# WATER

# 11241.1

## DOUBLE GOOSENECK WALL MOUNTED WITH STOP-COCK

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 17l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

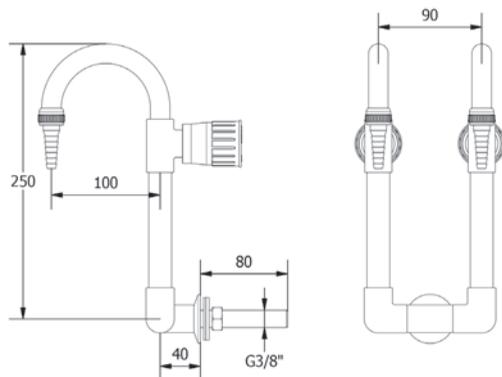

### WEIGHT:

- 2396 gr

WARRANTY 2 YEARS

# WATER

# 11242.1

## GOOSENECK WALL MOUNTED WITH STOP-COCK

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

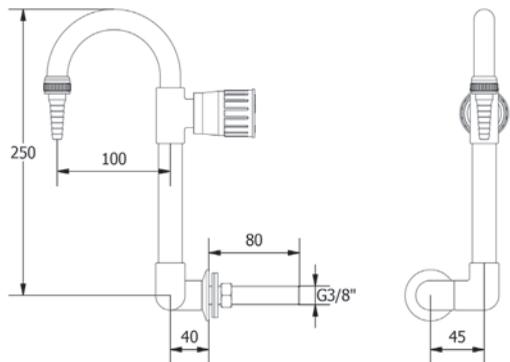

### WEIGHT:

- 1368 gr

WARRANTY 2 YEARS

# WATER

# 11243.1

## GOOSENECK BENCH MOUNTED WITH STOP-COCK

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1368 gr

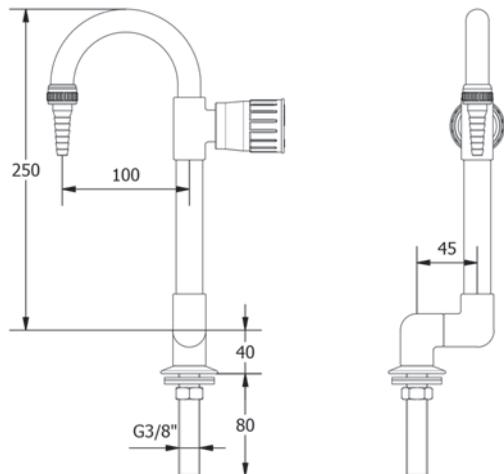

WARRANTY 2 YEARS

# WATER

# 11250.3

## BENCH MOUNTED L COLUMN WITH PVDF TUBE

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars
- Water only touch PP and PVDF

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP
- Internal body made in PP and PVDF

### HEADWORK SEALING:

- PP-CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Male thread G3/4" - G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### WEIGHT:

- 1083 gr

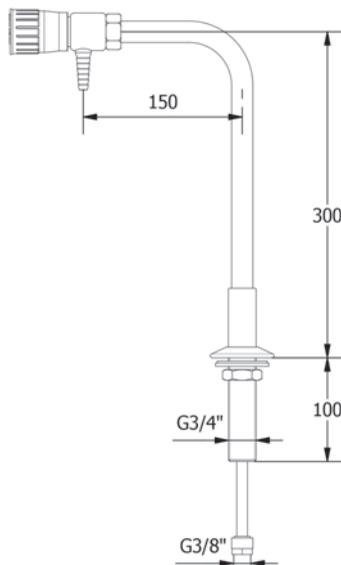

WARRANTY 2 YEARS

# WATER

# 11251.0

## BENCH L COLUMN WITH PP AND PVDF RE-CIRCULATING WATER SYSTEM

### APPLICATION:

- Bench mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars
- Water only touch PP and PVDF

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP
- Internal body made in PP and PVDF

### HEADWORK SEALING:

- PP-CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- PP tube  $\varnothing 32$

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1740 gr

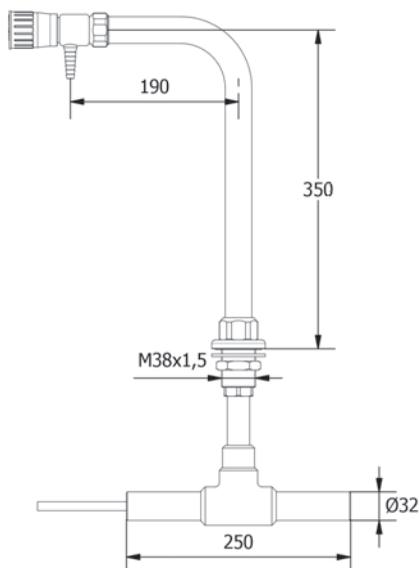

WARRANTY 2 YEARS

## FUME CUPBOARD REMOTE CONTROL FRONT MOUNTING

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:



- Copper tubes  $\varnothing 10$  or  $\varnothing 12$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

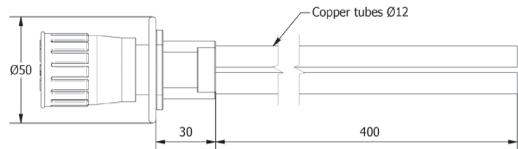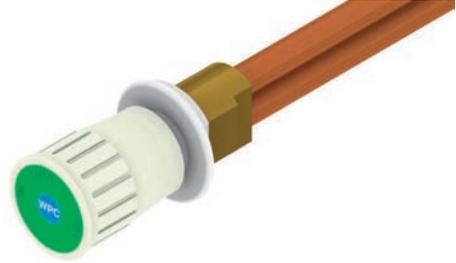

### WEIGHT:

- 650 gr

WARRANTY 2 YEARS

# WATER

# 11300.MIX

## FUME CUPBOARD WATER MIXER

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### HEADWORK SEALING:

- CERAMIC cartridge temperature working range: 0-70°

### CONNECTION TAP:


- Female G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

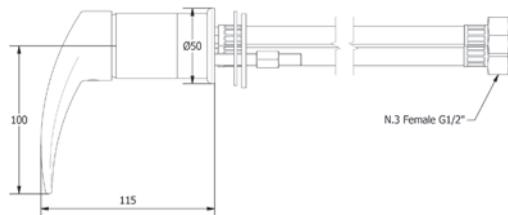

### WEIGHT:

- 1038 gr

WARRANTY 2 YEARS

# WATER

# 11310.0

## FUME CUPBOARD REMOTE CONTROL

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:



- Copper tubes  $\varnothing 10$  or  $\varnothing 12$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

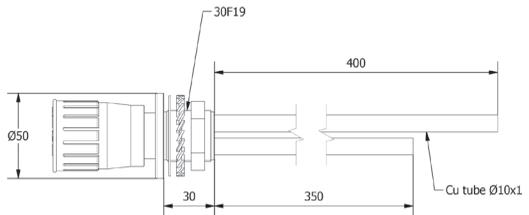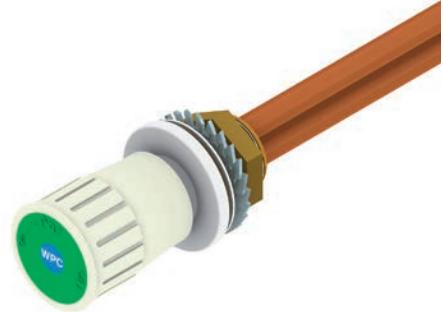

### WEIGHT:

- 648 gr

WARRANTY 2 YEARS

# WATER

# 11310.0PP

## PP FUME CUPBOARD REMOTE CONTROL

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

### SURFACE PROTECTION:

- Natural PP

### MATERIALS:

- All in PP

### HEADWORK SEALING:



- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:

- Female thread G1/4" - Connector for tube  $\varnothing 8 \times 6$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12918
- ISO228/1

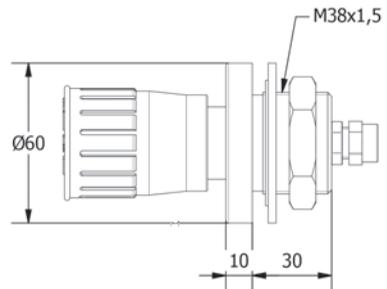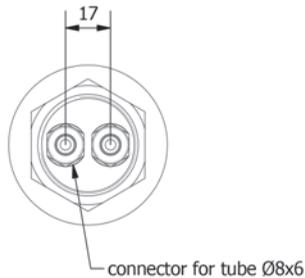

### WEIGHT:

- 260 gr

WARRANTY 2 YEARS

# WATER

# 11310.0WC

## FUME CUPBOARD REMOTE CONTROL

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Female thread G1/4"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

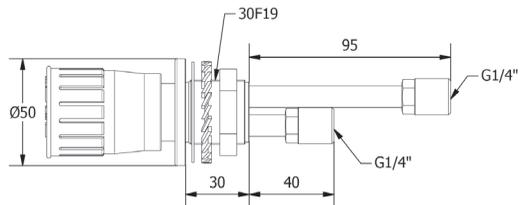

### WEIGHT:

- 549 gr

WARRANTY 2 YEARS

# WATER

# 11310.38x1.5

## FUME CUPBOARD REMOTE CONTROL

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:


- Thread for Flexibles

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

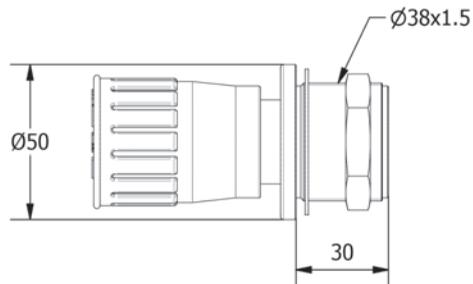

### WEIGHT:

- 648 gr

WARRANTY 2 YEARS

# WATER

# 11320.1

## 90° CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

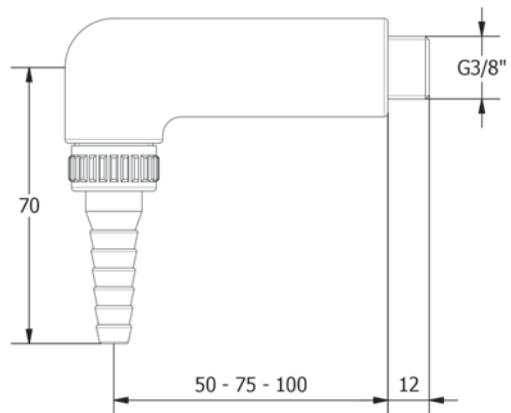

### WEIGHT:

- 648 gr

WARRANTY 2 YEARS

# WATER

# 11321.1

## 90° CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

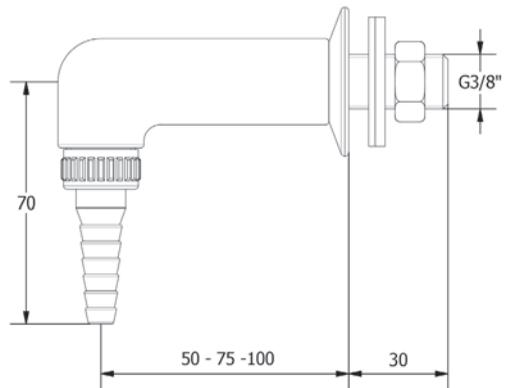

### WEIGHT:

- 458 gr

WARRANTY 2 YEARS

# WATER

# 11321.1PP

## PP 90° CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### MATERIALS:

- All in PP

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Laser printed medium on the rosetta

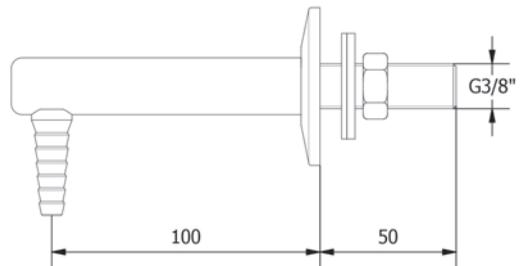

### WEIGHT:

- 80 gr

WARRANTY 2 YEARS

# WATER

# 11321.1PP75

PP 90° CONNECTION NOZZLE

**APPLICATION:**

- Wall mounting

**MATERIALS:**


- All in PP

**CONNECTION TAP:**

- Male thread G3/8"

**STANDARD AND NORMS:**

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

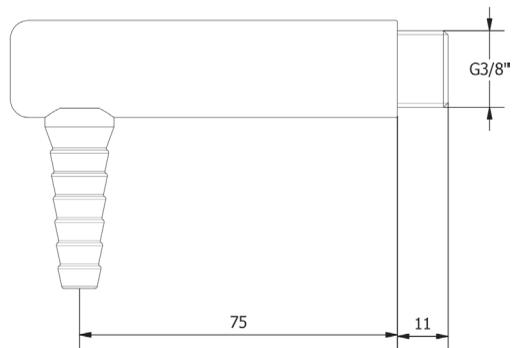

**WEIGHT:**

- 38 gr

WARRANTY 2 YEARS

# WATER

# 11321.1SG

90° CONNECTION NOZZLE WITH PP ROSETTA AND CHEMICAL ABBREVIATION

## APPLICATION:

- Wall mounting

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Rosetta in PP

## CONNECTION TAP:


- Male thread G3/8" - G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

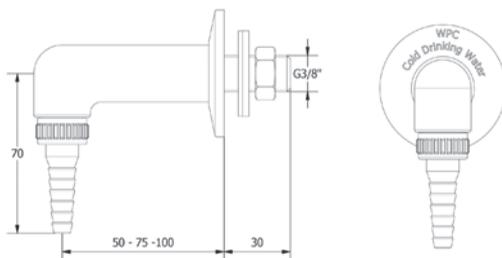

## WEIGHT:

- 487 gr

WARRANTY 2 YEARS

# WATER

# 11322.1

## WALL MOUNTED SWIVEL GOOSENECK SPOUT

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow back prevention valve

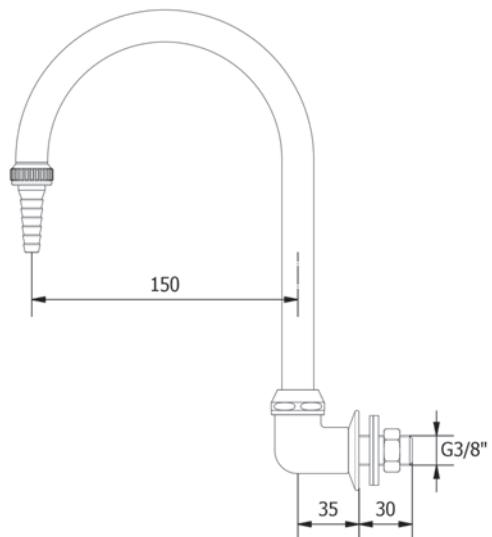

### WEIGHT:

- 487 gr

WARRANTY 2 YEARS

## WALL MOUNTED "U" SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

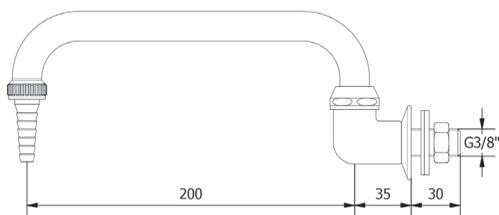

### WEIGHT:

- 530 gr

WARRANTY 2 YEARS

# WATER

# 11324.1

## WALL MOUNTED "S" SWIVELLING SPOUT

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

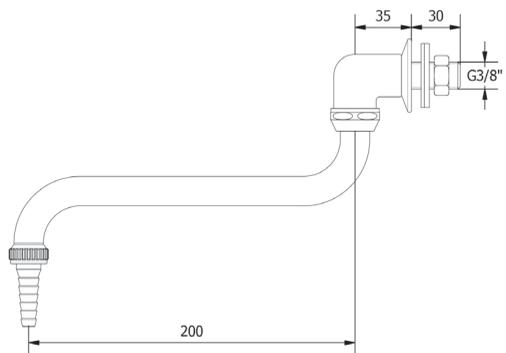

### WEIGHT:

- 485 gr

WARRANTY 2 YEARS

# WATER

# 11325.1

## STRAIGHT CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

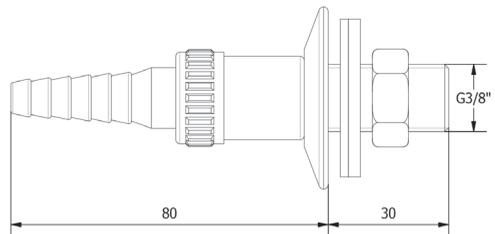

### WEIGHT:

- 238 gr

WARRANTY 2 YEARS

# WATER

# 11326.1

## GOOSENECK FIXED SPOUT

### APPLICATION:

- Bench mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

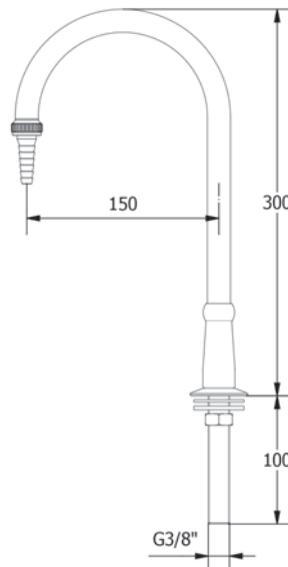

### WEIGHT:

- 622 gr

WARRANTY 2 YEARS

## GOOSENECK SWIVELLING SPOUT

### APPLICATION:

- Bench mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" - G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside
- With flow-back prevention valve

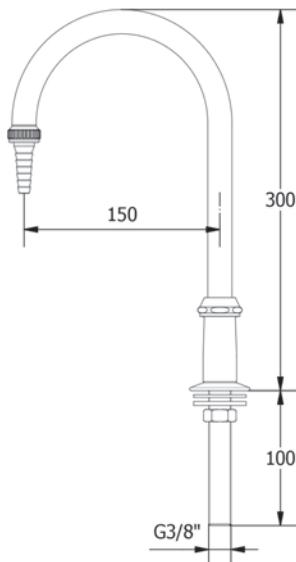

### WEIGHT:

- 546 gr

WARRANTY 2 YEARS