



**BURNING GASES**

# BURNING GASES

---

## Legend

Codes indicated with numbers:

**12xxx.1** supplied with G 3/8" coupling

**12xxx.2** supplied with G 1/2" coupling

1. To require chemical nickel plating add NK to the article's code  
**ex. 12001.1NK**

## Technical Information

The taps for combustible gases is supplied with ceramic safety spring lock head valve.

Fixed nozzle in compliance with the DIN12898 regulation.

Handles in compliance with the EN13792:2000 regulation and manufactured in acid-resistant PP.

Threads in compliance with the ISO228/1 regulation, B tolerance class.

The taps for combustible gases are tested for maximum working pressure of 0.2 Bar, manufactured under DIN 12918, and are all DVGW approved.

Taps finished with acid-resistant epoxy powder painting.

# BURNING GASES

# 12000.1

## STRAIGHT TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

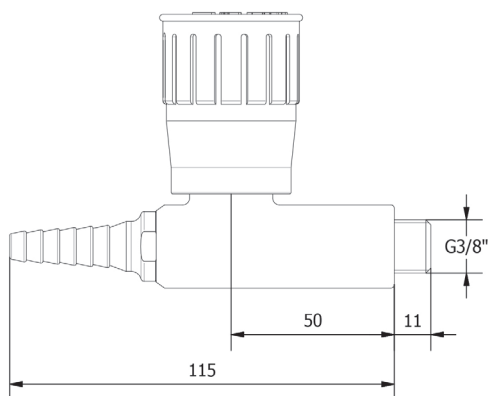

### WEIGHT:

- 495 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12001.1

TAP WITH 45° NOZZLE

## APPLICATION:

- Wall mounting
- Vertical mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

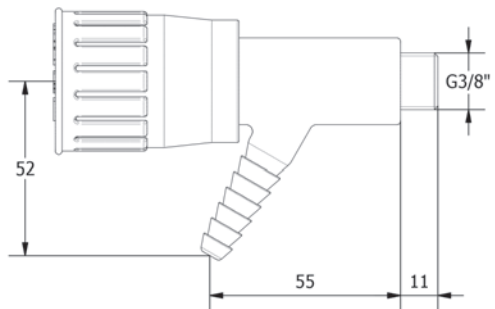

## WEIGHT:

- 346 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12002.1

WALL MOUNTED TAP 45° NOZZLE WITH INCLINED HANDLE

## APPLICATION:

- Wall mounting
- Vertical mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:

- Male thread G3/8"

## STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

## WEIGHT:

- 437 gr

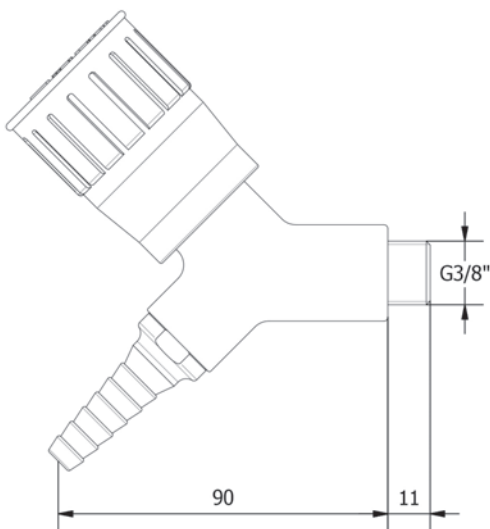

WARRANTY 2 YEARS

# BURNING GASES

# 12003.1

WALL MOUNTED 90° TAP

## APPLICATION:

- Wall mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

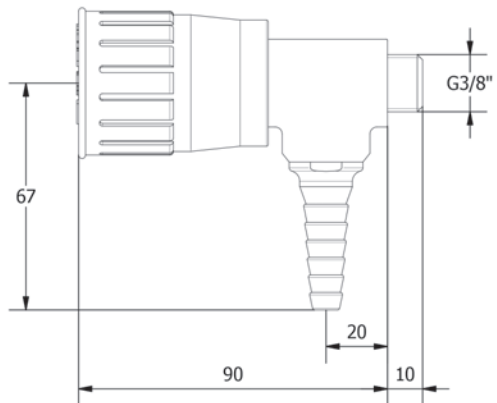

## WEIGHT:

- 354 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12006.1

STRAIGHT TAP WITH 45° NOZZLE

## APPLICATION:

- Wall mounting
- Vertical mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:

- Male thread G3/8"

## STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

## WEIGHT:

- 481 gr

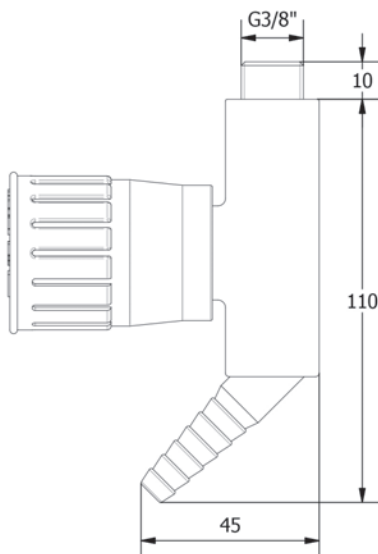

WARRANTY 2 YEARS

## SINGLE STANDOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

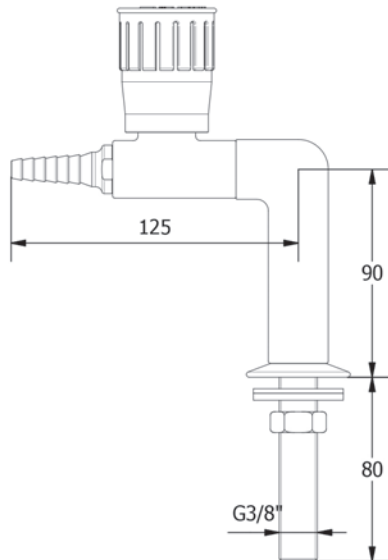

### WEIGHT:

- 1028 gr

WARRANTY 2 YEARS



# BURNING GASES

# 12011.1

T-STANDOUT 180°

## APPLICATION:

- Bench mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

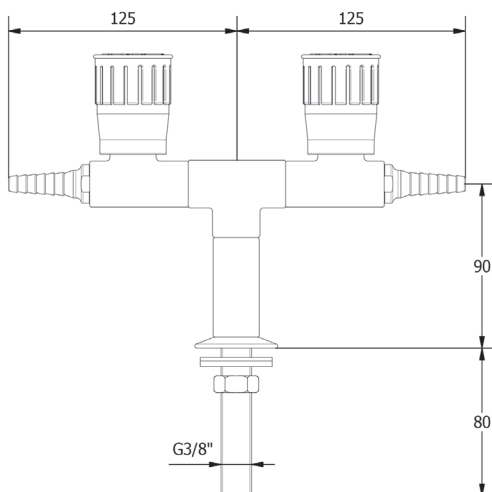

## WEIGHT:

- 1428 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12012.1

V-STANDOUT 90°

## APPLICATION:

- Bench mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

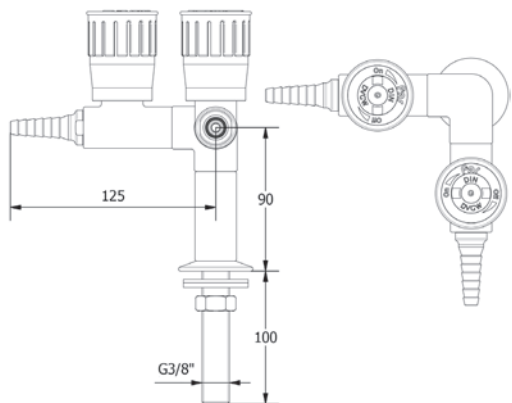

## WEIGHT:

- 1436 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12013.1

## 4 WAY STANDOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

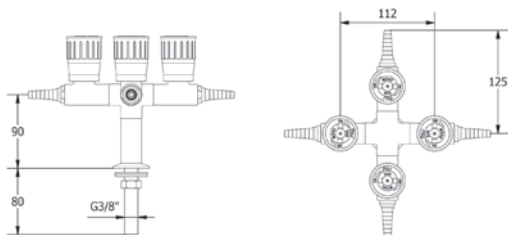

### WEIGHT:

- 2360 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12014.1

## SINGLE STANDOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:

- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

### WEIGHT:

- 1149 gr

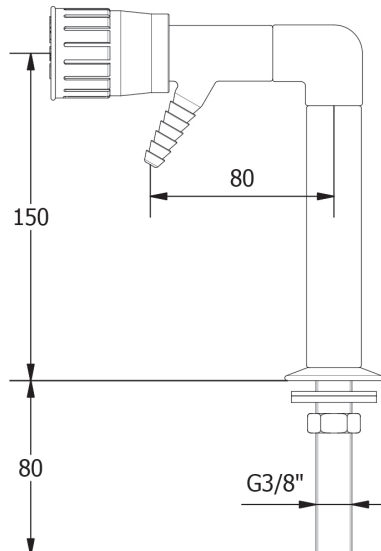

WARRANTY 2 YEARS

# BURNING GASES

# 12015.1

T-STANDOUT 180°

## APPLICATION:

- Bench mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

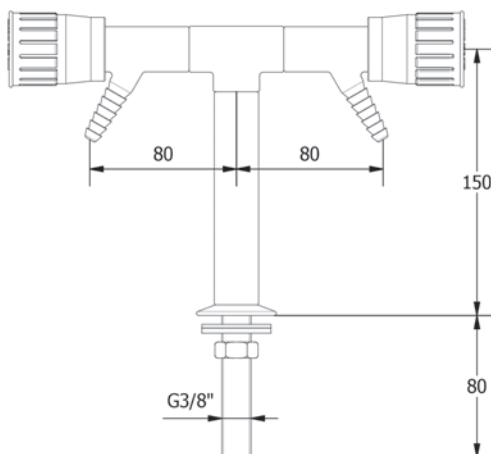

## WEIGHT:

- 1454 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12016.1

V-STANDOUT 90°

## APPLICATION:

- Bench mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

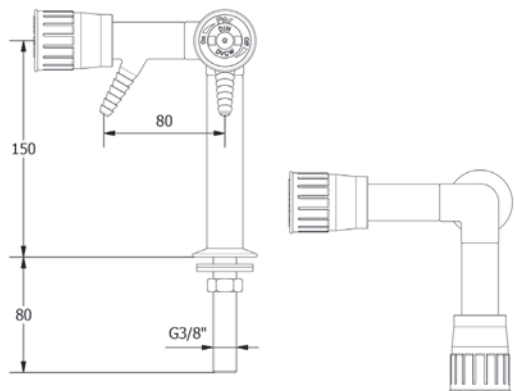

## WEIGHT:

- 1499 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12017.1

## 4 WAY STANDOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:



- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside



### WEIGHT:

- 2275 gr

WARRANTY 2 YEARS

## SINGLE STANDOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

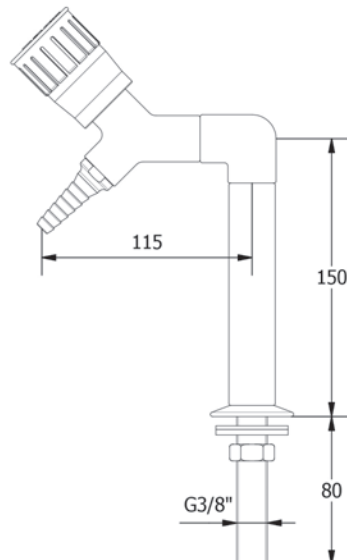

### WEIGHT:

- 1240 gr

WARRANTY 2 YEARS



# BURNING GASES

# 12019.1

T-STANDOUT 180°

## APPLICATION:

- Bench mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:

- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

## WEIGHT:

- 1637 gr

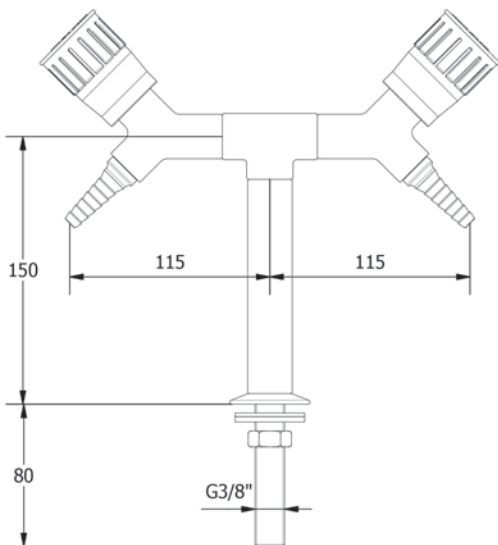

WARRANTY 2 YEARS

V-STANDOUT 90°

**APPLICATION:**

- Bench mounting

**DETAILS:**

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

**SURFACE PROTECTION:**

- Epoxy powder coating RAL 7035

**MATERIALS:**

- Brass
- Handle in PP

**HEADWORK SEALING:**

- CERAMIC and Nitrile

**CONNECTION TAP:**


- Male thread G3/8" or G1/2"

**STANDARD AND NORMS:**

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

**OPTIONS:**

- With chemical nickel plating 17 microns inside

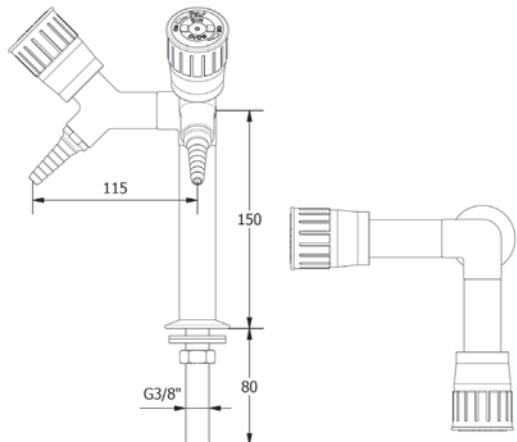**WEIGHT:**

- 1681 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12021.1

## 4 WAY STANDOUT

### APPLICATION:

- Bench mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

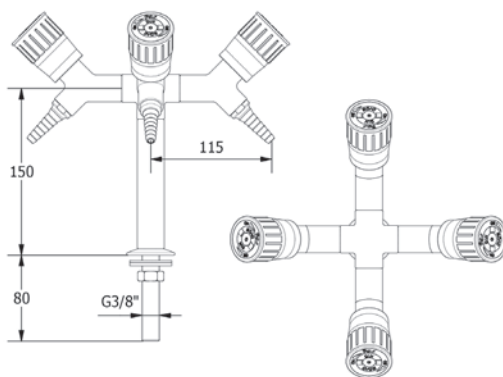

### WEIGHT:

- 2640 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12023.1

SINGLE STANDOUT WITH QUICK RELEASE

## APPLICATION:

- Bench mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars
- Seld closing quick-release

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

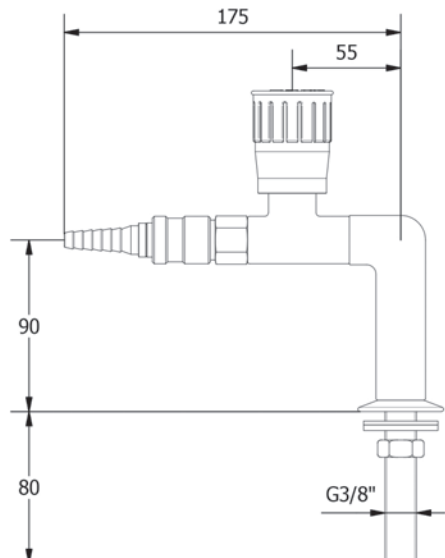

## WEIGHT:

- 1175 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12050.1

## STRAIGHT TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

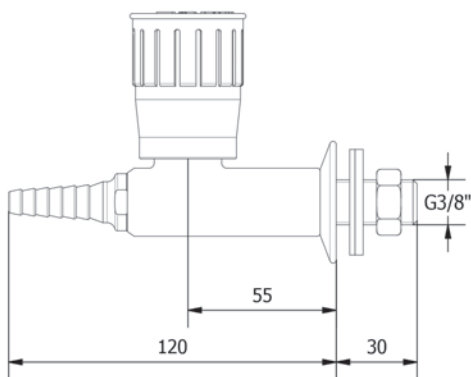

### WEIGHT:

- 611 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12051.1

TAP WITH 45° NOZZLE

## APPLICATION:

- Wall mounting
- Vertical mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

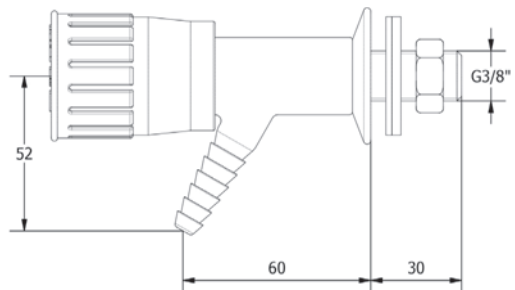

## WEIGHT:

- 465 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12052.1

WALL MOUNTED TAP 45° NOZZLE WITH INCLINED HANDLE

## APPLICATION:

- Wall mounting
- Vertical mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

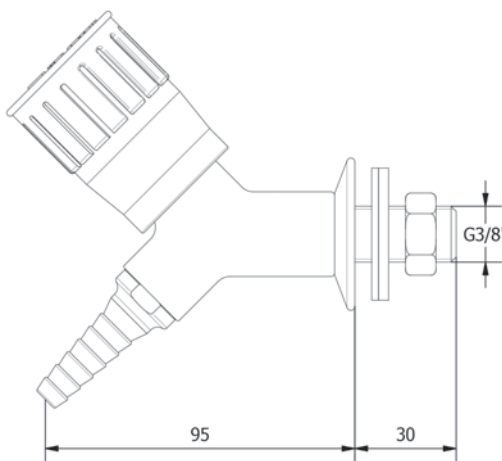

## WEIGHT:

- 549 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12053.1

WALL MOUNTED 90° TAP

## APPLICATION:

- Wall mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

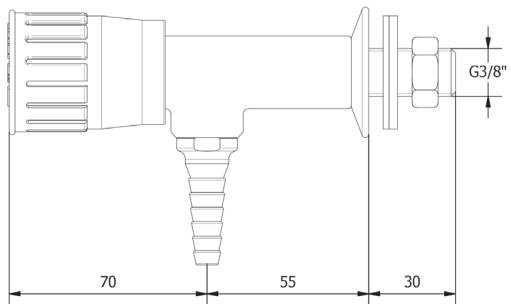

## WEIGHT:

- 597 gr

WARRANTY 2 YEARS



# BURNING GASES

# 12054.1

## STRAIGHT TAP WITH 45° NOZZLE

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

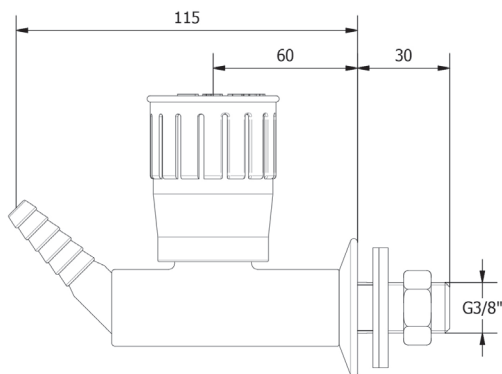

### WEIGHT:

- 621 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12056.1

WALL MOUNTED TAP 90° NOZZLE WITH QUICK RELEASE

## APPLICATION:

- Wall mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars
- Self closing quick-release

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

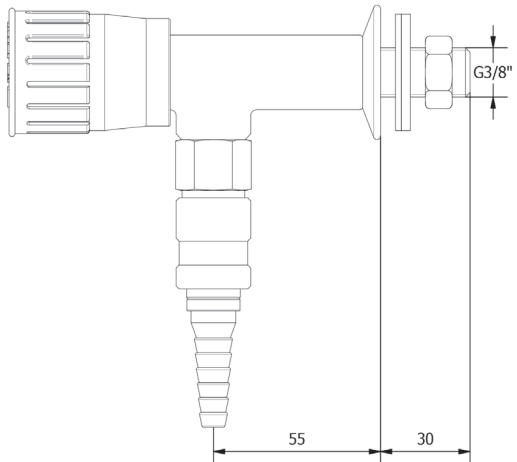

## WEIGHT:

- 743 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12060.1

## "V" WALL MOUNTED TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

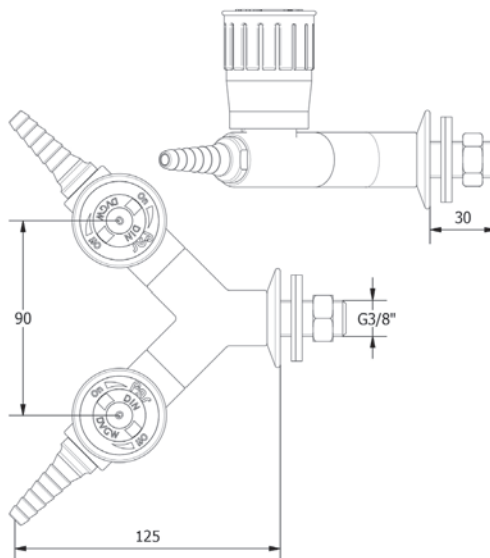

### WEIGHT:

- 1207 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12061.1

"V" WALL MOUNTED TAP WITH 45° NOZZLE

## APPLICATION:

- Wall mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

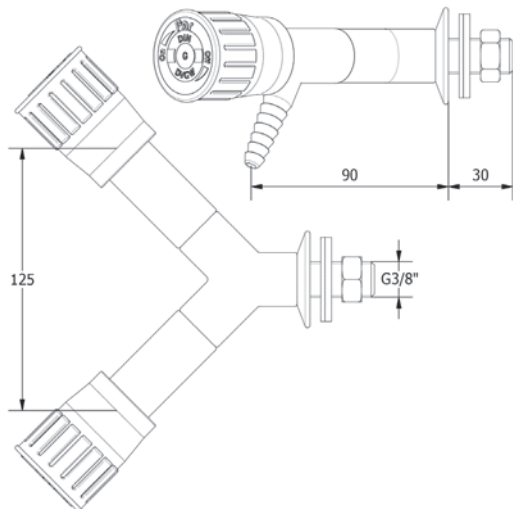

## WEIGHT:

- 1057 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12062.1

"V" WALL MOUNTED TAP WITH 90° NOZZLE

## APPLICATION:

- Wall mounting

## DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

## SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

## MATERIALS:

- Brass
- Handle in PP

## HEADWORK SEALING:

- CERAMIC and Nitrile

## CONNECTION TAP:


- Male thread G3/8" or G1/2"

## STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

## OPTIONS:

- With chemical nickel plating 17 microns inside

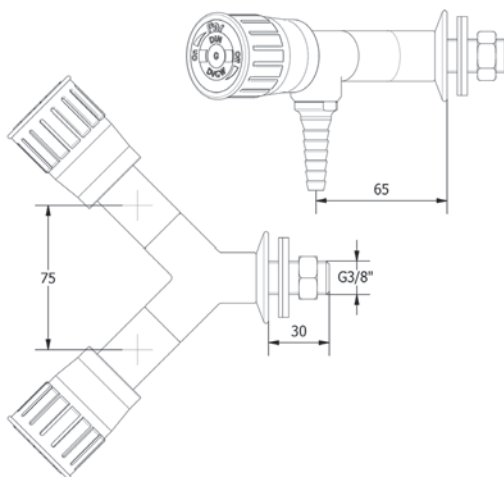

## WEIGHT:

- 1058 gr

WARRANTY 2 YEARS

## "Y" VERTICAL TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

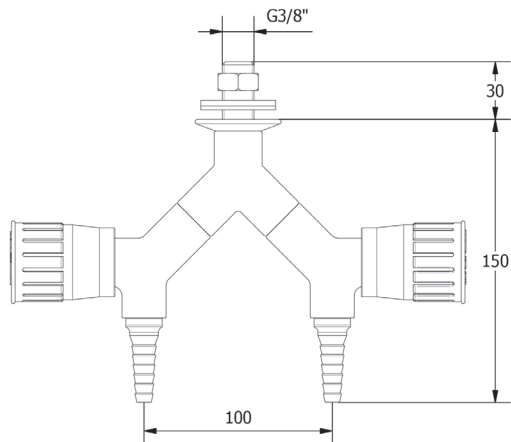

### WEIGHT:

- 1240 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12065.1

## U VERTICAL TAP

### APPLICATION:

- Wall mounting
- Vertical mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass
- Handle in PP

### HEADWORK SEALING:

- CERAMIC and Nitrile

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

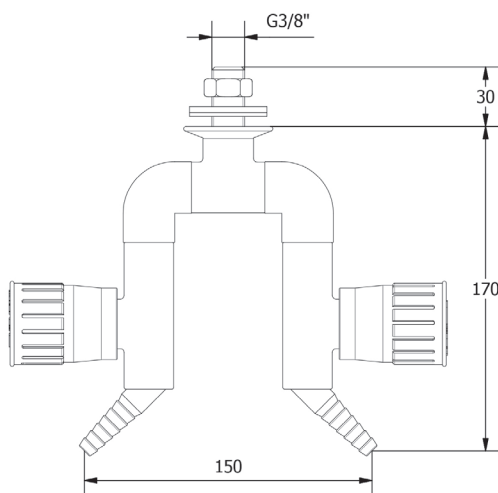

### WEIGHT:

- 1525 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12300.0

## FUME CUPBOARD REMOTE CONTROL FRONT MOUNTING

### APPLICATION:

- Wall mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:



- CERAMIC and Nitrile

### CONNECTION TAP:

- Copper tubes  $\varnothing 10$  or  $\varnothing 12$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

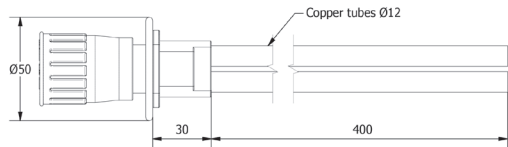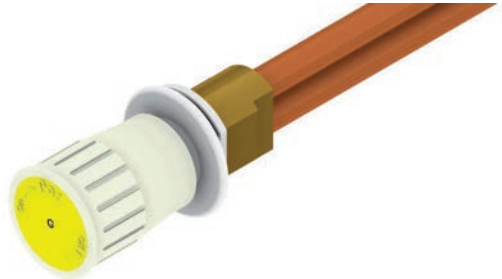

### WEIGHT:

- 650 gr

WARRANTY 2 YEARS



# BURNING GASES

# 12310.0

## FUME CUPBOARD REMOTE CONTROL

### APPLICATION:

- Wall mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:



- CERAMIC and Nitrile

### CONNECTION TAP:

- Copper tubes  $\varnothing 10$  or  $\varnothing 12$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

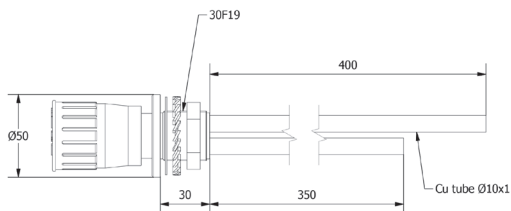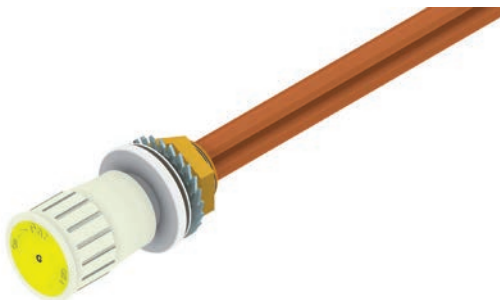

### WEIGHT:

- 648 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12310.0WC

## FUME CUPBOARD REMOTE CONTROL

### APPLICATION:

- Wall mounting

### DETAILS:

- Test pressure: 0,2 Bars/air
- Max working pressure: 0,2 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:


- CERAMIC and Nitrile

### CONNECTION TAP:

- Female thread G1/4"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

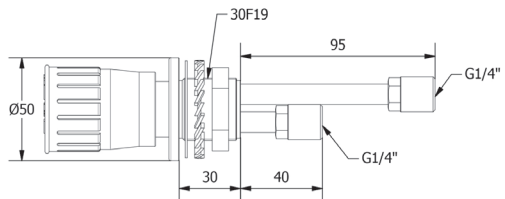

### WEIGHT:

- 549 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12320.1

## 90° CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

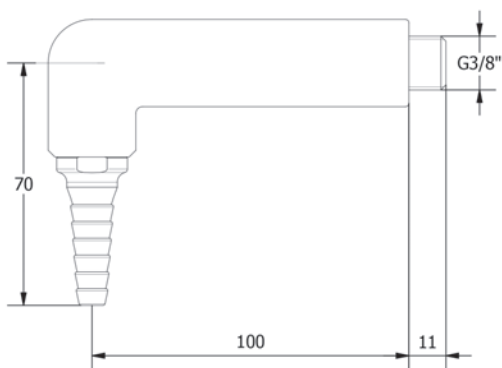

### WEIGHT:

- 538 gr

WARRANTY 2 YEARS

## 45° CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

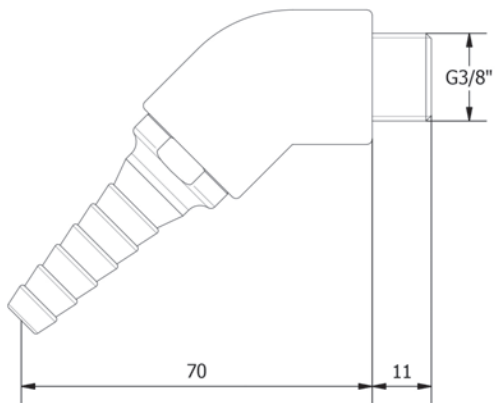

### WEIGHT:

- 206 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12322.1

## STRAIGHT CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

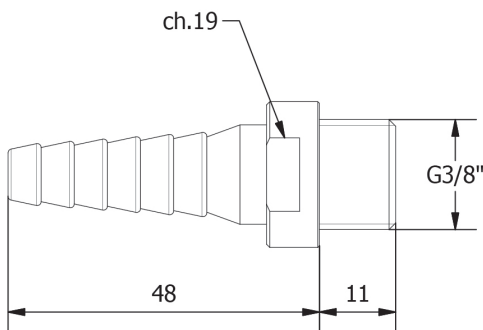

### WEIGHT:

- 66 gr

WARRANTY 2 YEARS

## 45° CONNECTION NOZZLE

### APPLICATION:

- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

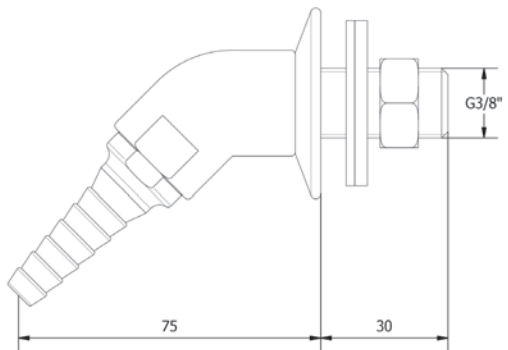

### WEIGHT:

- 330 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12324.1SG

45° CONNECTION NOZZLE WITH PP ROSETTA AND CHEMICAL ABBREVIATION

**APPLICATION:**

- Wall mounting

**SURFACE PROTECTION:**

- Epoxy powder coating RAL 7035

**MATERIALS:**

- Brass
- Rosetta in PP

**CONNECTION TAP:**


- Male thread G3/8" or G1/2"

**STANDARD AND NORMS:**

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

**OPTIONS:**

- With chemical nickel plating 17 microns inside

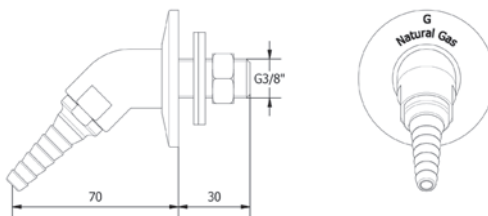**WEIGHT:**

- 283 gr

WARRANTY 2 YEARS

# BURNING GASES

# 12325.1

## BENCH 90° CONNECTION NOZZLE

### APPLICATION:

- Bench mounting
- Wall mounting

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass

### CONNECTION TAP:


- Male thread G3/8" or G1/2"

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- With chemical nickel plating 17 microns inside

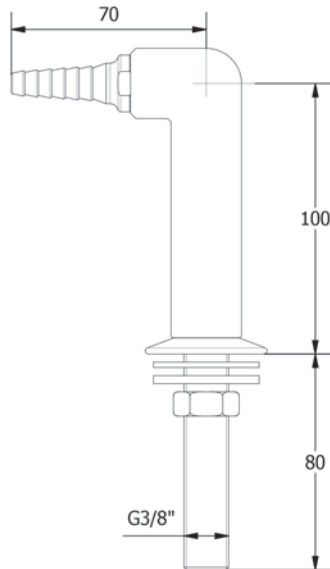

### WEIGHT:

- 714 gr

WARRANTY 2 YEARS



# BURNING GASES

# 12326.1

90° CONNECTION NOZZLE WITH QUICK RELEASE

**APPLICATION:**

- Wall mounting
- Bench mounting

**SURFACE PROTECTION:**

- Epoxy powder coating RAL 7035

**MATERIALS:**

- Brass

**CONNECTION TAP:**


- Male thread G3/8" or G1/2"

**STANDARD AND NORMS:**

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

**OPTIONS:**

- With chemical nickel plating 17 microns inside

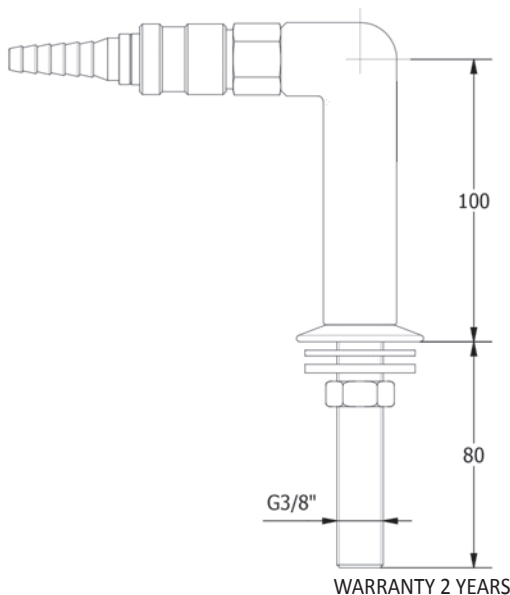**WEIGHT:**

- 538 gr