



TECHNICAL GASES

TECHNICAL GASES

Legend

Codes indicated with numbers:

13xxx.1 supplied with G 3/8" coupling

13xxx.2 supplied with G 1/2" coupling

1. To require chemical nickel plating add NK to the article's code
ex. 13001.1NK

Technical Information

The taps for technical gases are supplied with refined adjustment head valve, with sealing in PTFE.

Fixed nozzle in compliance with DIN 12898 regulation.

Handles in compliance with EN13792:2000 regulation and manufactured in acid-resistant PP.

Threads in compliance with ISO228/1 regulation, B tolerance class.

Taps are built following the DIN 12918 norm.

The taps for oxygen and hydrogen are equipped with an headwokv lubricated with specific and omologated grease.

Maximum working pressure 10 Bar.

Taps finished with acid-resistant epoxy powder painting.

STRAIGHT TAP

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

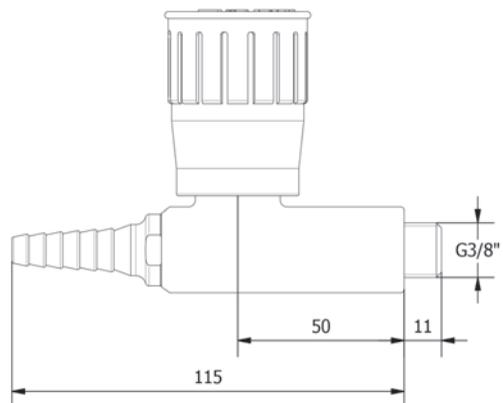

WEIGHT:

- 525 gr

WARRANTY 2 YEARS

TAP WITH 45° NOZZLE

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

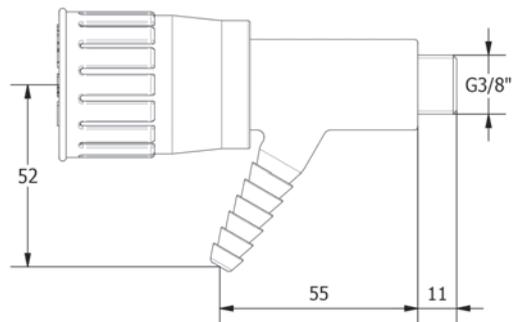

WEIGHT:

- 376 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13002.1

WALL MOUNTED TAP 45° NOZZLE WITH INCLINED HANDLE

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 468 gr

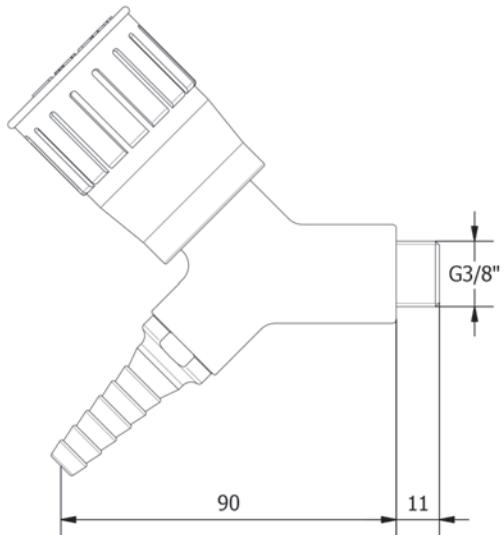

WARRANTY 2 YEARS

WALL MOUNTED 90° TAP

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

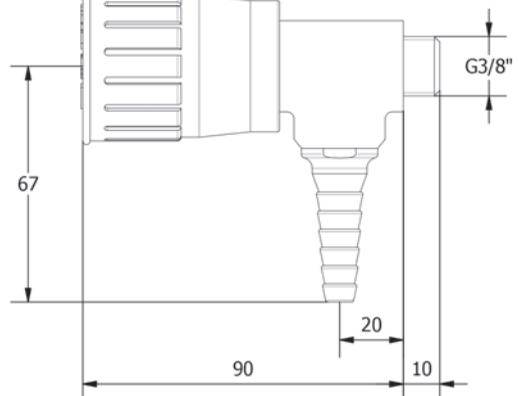

WEIGHT:

- 381 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13006.1

STRAIGHT TAP WITH 45° NOZZLE

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 511 gr

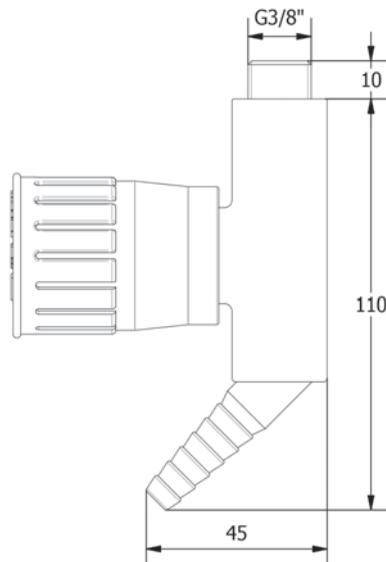

WARRANTY 2 YEARS

SINGLE STANDOUT

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 1059 gr

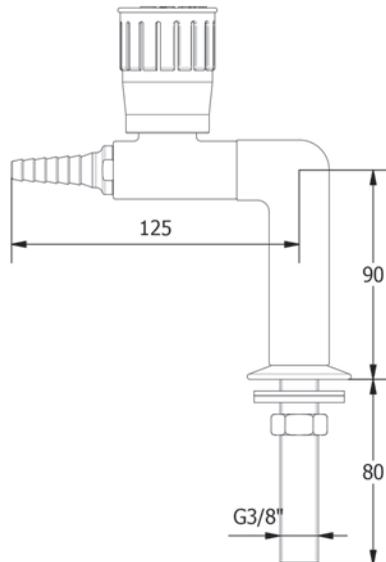

WARRANTY 2 YEARS

TECHNICAL GASES

13011.1

T-STANDOUT 180°

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 1489 gr

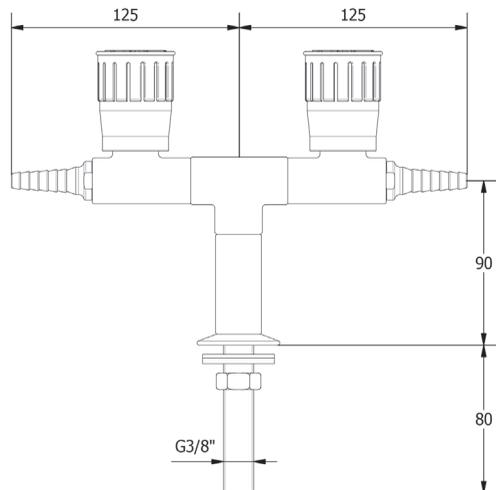

WARRANTY 2 YEARS

V-STANDOUT 90°

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

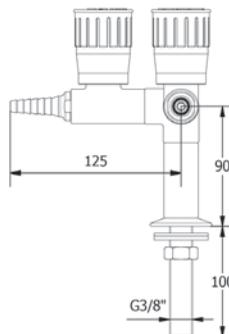

WEIGHT:

- 1497 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13013.1

4 WAY STANDOUT

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

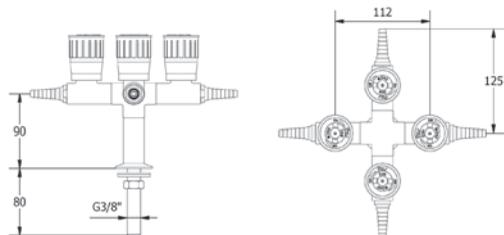

WEIGHT:

- 2481 gr

WARRANTY 2 YEARS

SINGLE STANDOUT

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 1179 gr

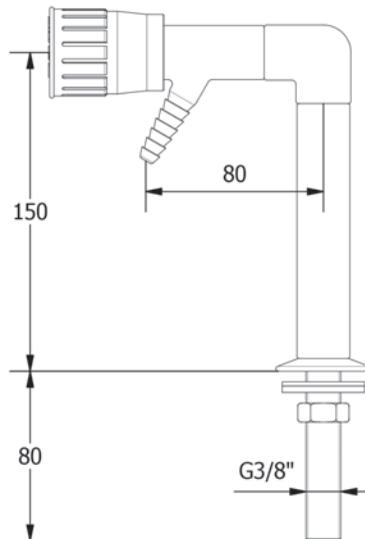

WARRANTY 2 YEARS

TECHNICAL GASES

13015.1

T-STANDOUT 180°

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

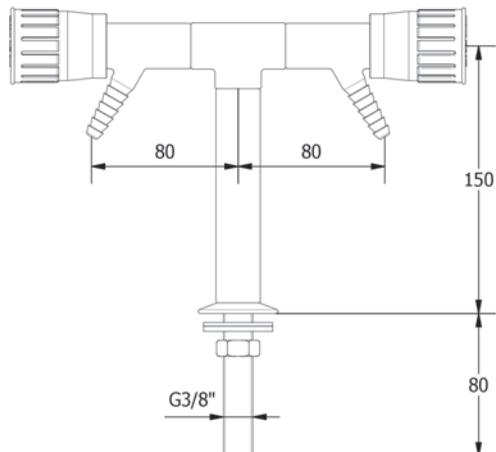

WEIGHT:

- 1515 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13016.1

V-STANDOUT 90°

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

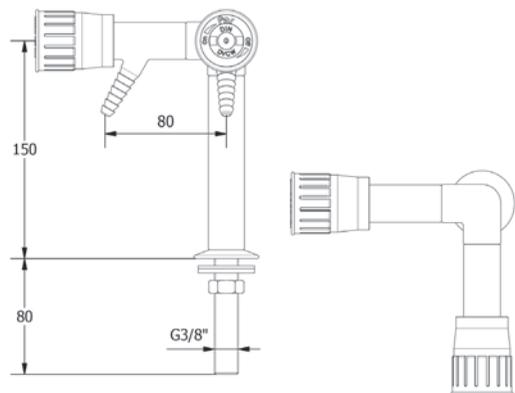

WEIGHT:

- 1559 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13017.1

4 WAY STANDOUT

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

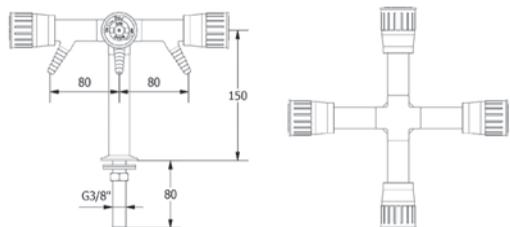

WEIGHT:

- 2397 gr

WARRANTY 2 YEARS

SINGLE STANDOUT

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 1270 gr

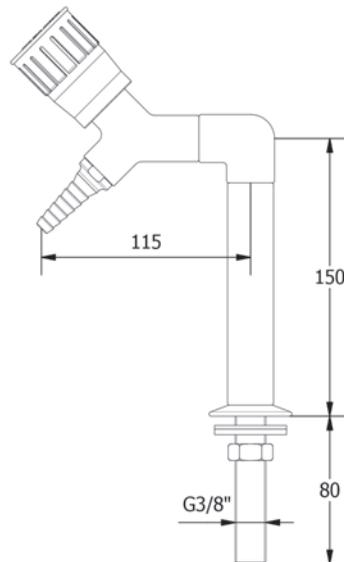

WARRANTY 2 YEARS

TECHNICAL GASES

13019.1

T-STANDOUT 180°

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 1697 gr

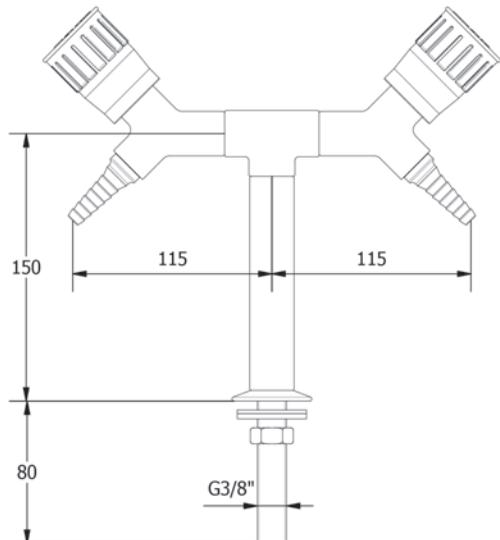

WARRANTY 2 YEARS

TECHNICAL GASES

13020.1

V-STANDOUT 90°

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

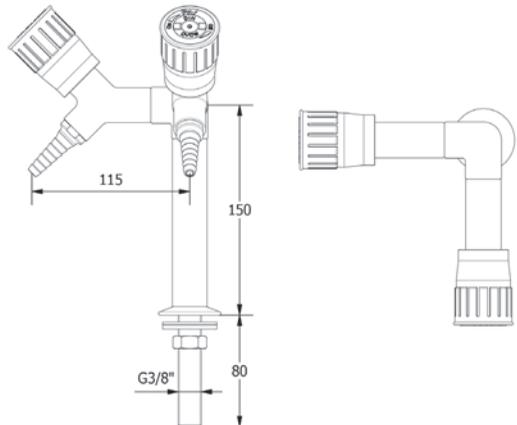

WEIGHT:

- 1742 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13021.1

4 WAY STANDOUT

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

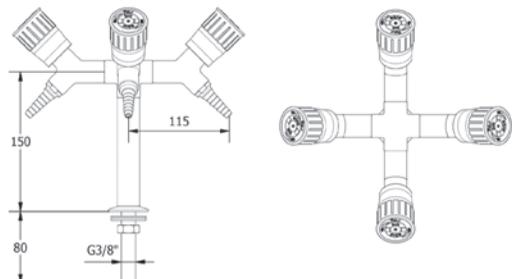

WEIGHT:

- 2762 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13023.1

SINGLE STANDOUT WITH QUICK RELEASE

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars
- Self closing quick release

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 1205 gr

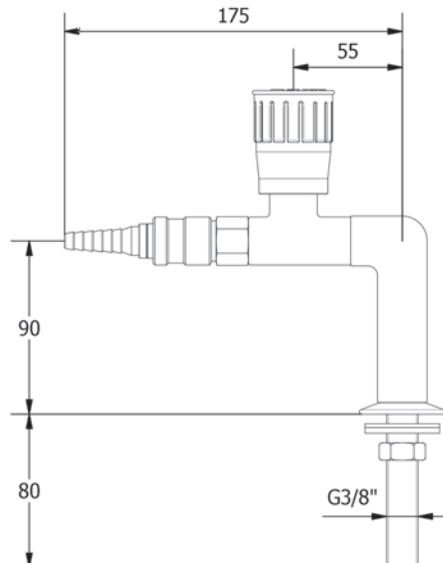

WARRANTY 2 YEARS

TECHNICAL GASES

13050.1

STRAIGHT TAP

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

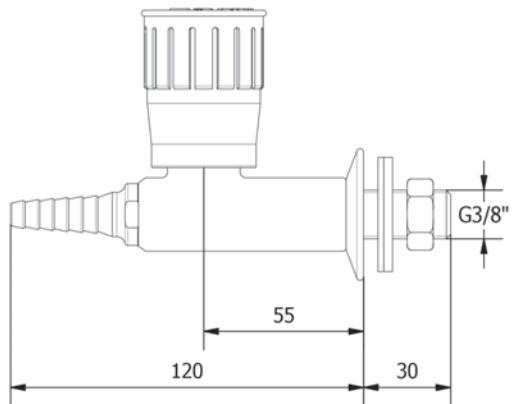

WEIGHT:

- 641 gr

WARRANTY 2 YEARS

TAP WITH 45° NOZZLE

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

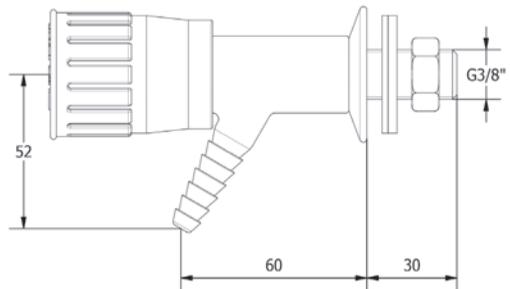

WEIGHT:

- 496 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13052.1

WALL MOUNTED TAP 45° NOZZLE WITH INCLINED HANDLE

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

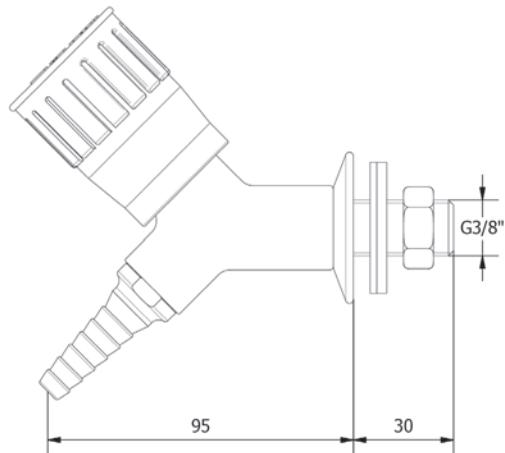

WEIGHT:

- 589 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13053.1

WALL MOUNTED 90° TAP

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

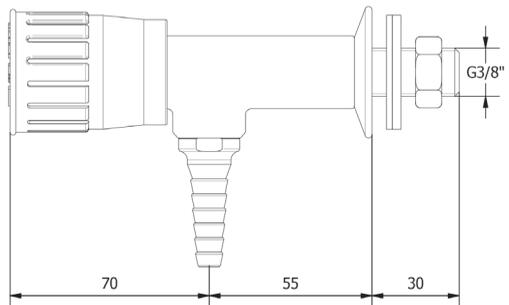

WEIGHT:

- 627 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13054.1

STRAIGHT TAP WITH 45° NOZZLE

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

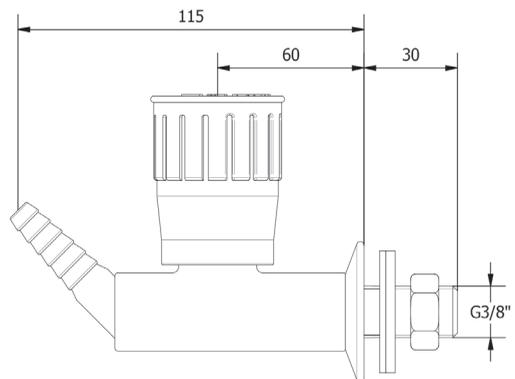

WEIGHT:

- 651 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13056.1

WALL MOUNTED TAP 90° NOZZLE WITH QUICK RELEASE

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars
- Self closing quick release

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

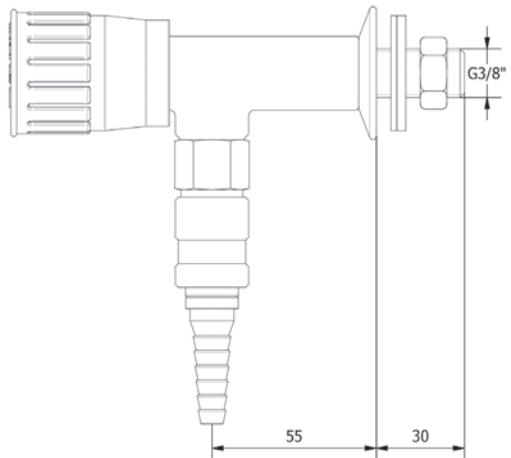

WEIGHT:

- 773 gr

WARRANTY 2 YEARS

"V" WALL MOUNTED TAP

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:



- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

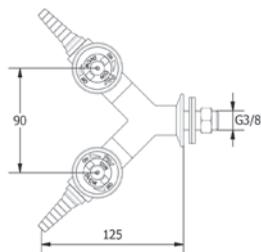

WEIGHT:

- 1268 gr

WARRANTY 2 YEARS

“V” WALL MOUNTED TAP WITH 45° NOZZLE

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

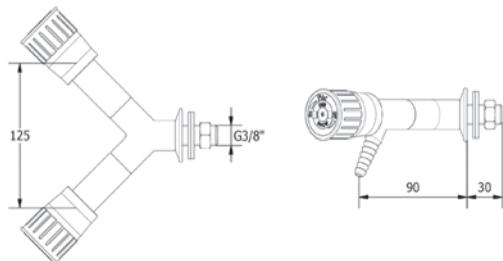

WEIGHT:

- 1118 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13062.1

"V" WALL MOUNTED TAP WITH 90° NOZZLE

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

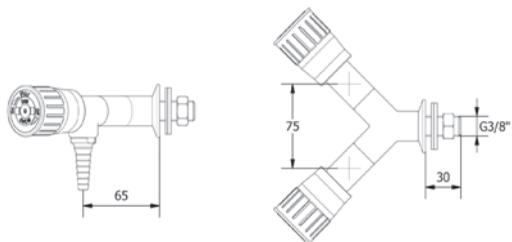

WEIGHT:

- 1118 gr

WARRANTY 2 YEARS

"Y" VERTICAL TAP

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

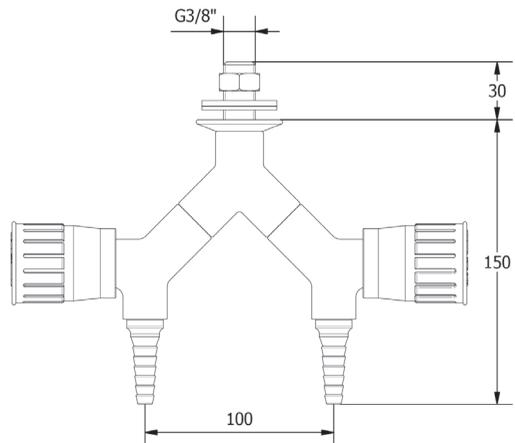

WEIGHT:

- 1301 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13065.1

"U" VERTICAL TAP

APPLICATION:

- Wall mounting
- Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:


- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

WEIGHT:

- 1586 gr

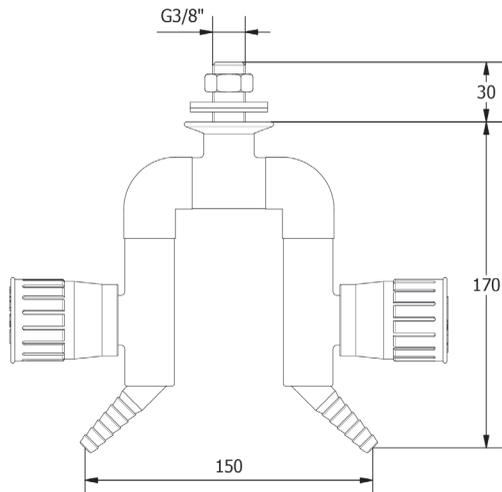

WARRANTY 2 YEARS

FUME CUPBOARD REMOTE CONTROL FRONT MOUNTING

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass - Copper
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:



- Copper tubes $\varnothing 10$ or $\varnothing 12$

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

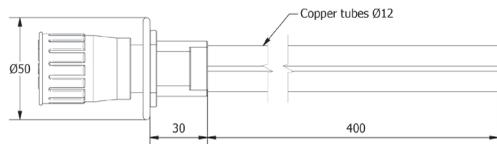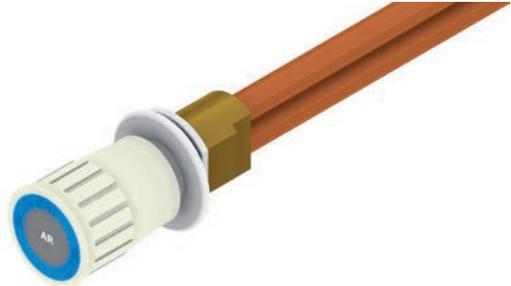

WEIGHT:

- 650 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13310.0

FUME CUPBOARD REMOTE CONTROL

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass - Copper
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Copper tuber $\varnothing 10$ or $\varnothing 12$

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

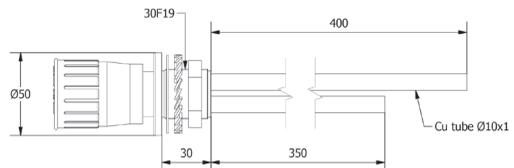

WEIGHT:

- 648 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13310.0WC

FUME CUPBOARD REMOTE CONTROL

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass - Copper
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Female thread G1/4"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

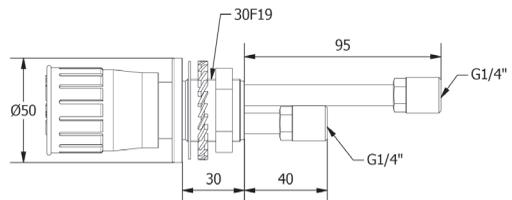

WEIGHT:

- 549 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13310.38x1.5

FUME CUPBOARD REMOTE CONTROL

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass - Copper
- Handle in PP

HEADWORK SEALING:

- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Thread for flexibles

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

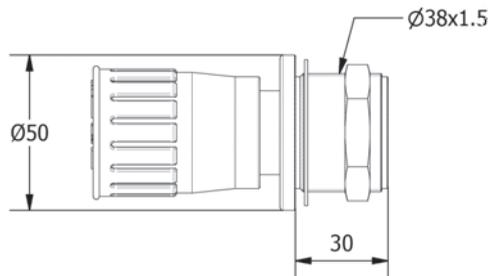

WEIGHT:

- 648 gr

WARRANTY 2 YEARS

90° CONNECTION NOZZLE

APPLICATION:

- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass

CONNECTION TAP:


- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

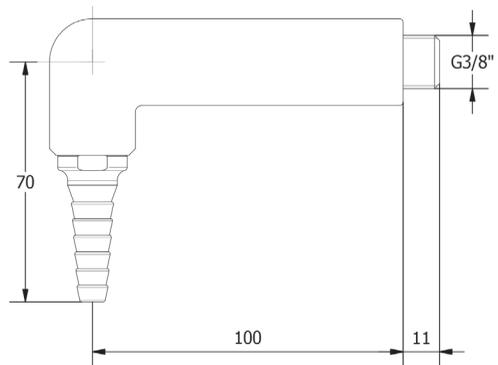

WEIGHT:

- 538 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13321.1

45° CONNECTION NOZZLE

APPLICATION:

- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass

CONNECTION TAP:


- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

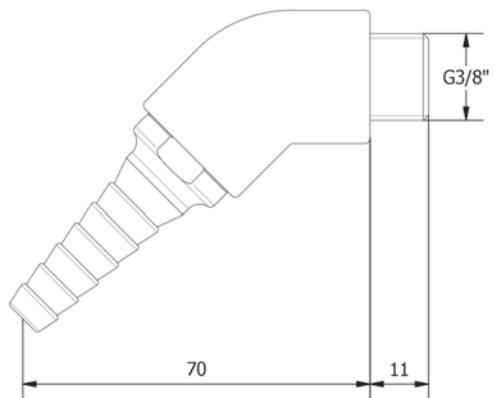

WEIGHT:

- 206 gr

WARRANTY 2 YEARS

STRAIGHT CONNECTION NOZZLE

APPLICATION:

- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass

CONNECTION TAP:


- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

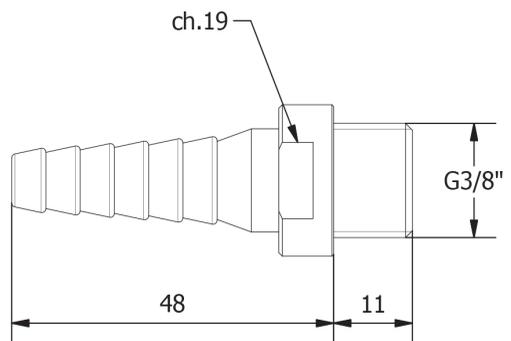

WEIGHT:

- 66 gr

WARRANTY 2 YEARS

45° CONNECTION NOZZLE

APPLICATION:

- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass

CONNECTION TAP:


- Male thread G3/8" - G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

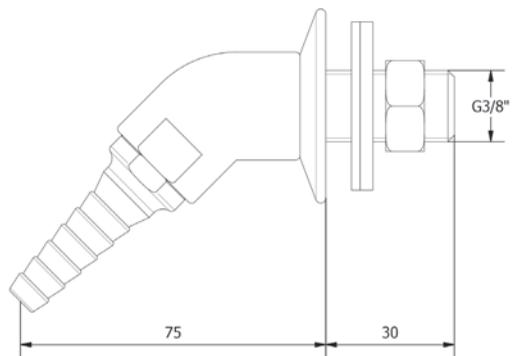

WEIGHT:

- 330 gr

WARRANTY 2 YEARS

45° CONNECTION NOZZLE WITH PP ROSETTA AND CHEMICAL ABBREVIATION

APPLICATION:

- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Rosetta in PP

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

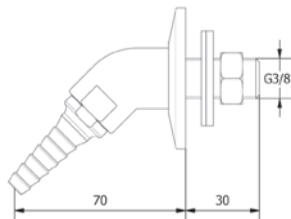**WEIGHT:**

- 283 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13325.1

BENCH 90° CONNECTION NOZZLE

APPLICATION:

- Bench mounting
- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

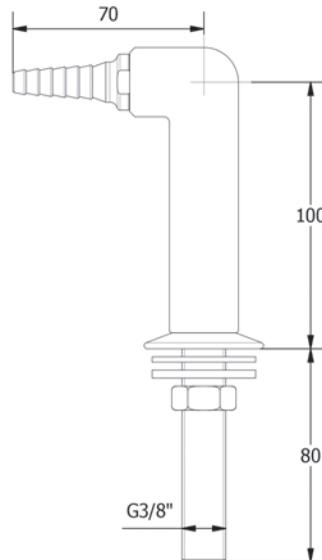

WEIGHT:

- 714 gr

WARRANTY 2 YEARS

TECHNICAL GASES

13326.1

90° CONNECTION NOZZLE WITH QUICK RELEASE

APPLICATION:

- Wall mounting
- Bench mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass

CONNECTION TAP:


- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- With chemical nickel plating 17 microns inside

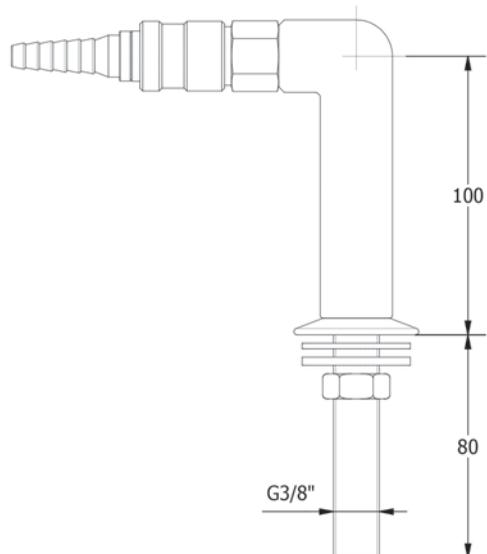

WEIGHT:

- 538 gr

WARRANTY 2 YEARS