

PURE WATER



PURE WATER

Technical Information

NUOVA FAR S.r.l. engineered a new PP taps line to satisfy the need of prevent any damage of the pure waters. This new line is made in RAL7032 colour, and allow that the water erogated goes in touch only with PP and never with metals or other contaminating materials. The open and close system is a PP ceramic headwork with 90° rotation and can work up to 6 bars pressure.

All the models made in PP are supplied with a G1/2" male threaded leg, and a female G1/4" thread that allow to screw inside a connector in PP for tube diameter external mm8 and internal mm6. The threaded leg also have a double flat Ch.17 for an easier closing of the fixing nut and for an easier assembly of the PP tube connector inside.

All the taps are also supplied with a PP rosetta, with laser printed the chemical abbreviation of the water following the EN13792 norm, as also the textual indication. All the taps are supplied with removable nozze G1/2".

PURE WATER

11010.2PPR

STRAIGHT PURE WATER PP TAP

APPLICATION:

- Wall mounting

DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

CONTACT MATERIALS:

- PP RAL7032
- Ceramic

HEADWORK SEALING:

- CERAMIC temperature working range: 0-50°

CONNECTION TAP:


- Male thread G1/2" - Female G1/4"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- Laser printed medium on the rosetta

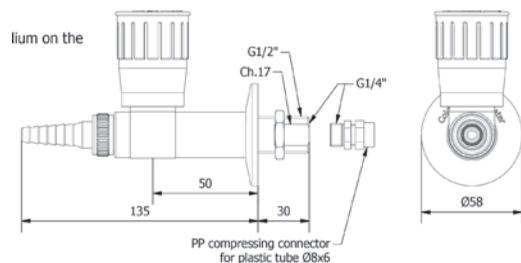

WEIGHT:

- 153 gr

WARRANTY 2 YEARS

PURE WATER

11012.2PPR

WALL MOUNTED PURE WATER PP TAP

APPLICATION:

- Wall mounting

DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

CONTACT MATERIALS:

- PP RAL7032
- Ceramic

HEADWORK SEALING:

- CERAMIC temperature working range: 0-50°

CONNECTION TAP:


- Male thread G1/2" - Female G1/4"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- Laser printed medium on the rosetta

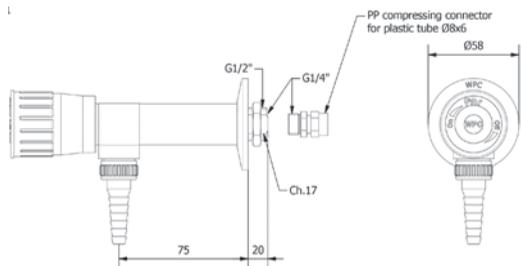

WEIGHT:

- 152 gr

WARRANTY 2 YEARS

PURE WATER

11031.2PPR

WALL MOUNTED PURE WATER PP TAP WITH SWIVELLING SPOUT

APPLICATION:

- Wall mounting

DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

CONTACT MATERIALS:

- PP RAL7032
- Ceramic

HEADWORK SEALING:

- CERAMIC temperature working range: 0-50°

CONNECTION TAP:


- Male thread G1/2" - Female G1/4"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- Laser printed medium on the rosetta

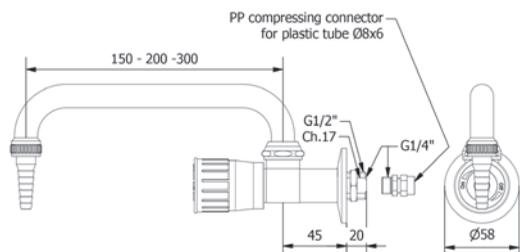

WEIGHT:

- 309 gr

WARRANTY 2 YEARS

PURE WATER

11071.3PPR

BENCH MOUNTED PURE WATER PP TAP WITH SWIVELLING SPOUT

APPLICATION:

- Bench mounting

DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

CONTACT MATERIALS:

- PP RAL7032
- Ceramic

HEADWORK SEALING:

- CERAMIC temperature working range: 0-50°

CONNECTION TAP:


- Male thread G3/4" - G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

WEIGHT:

- 935 gr

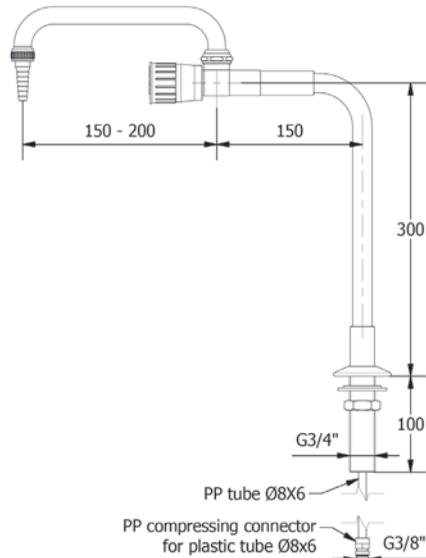

WARRANTY 2 YEARS

PURE WATER

11080.2PPR

BENCH MOUNTED PURE WATER PP TAP WITH SWIVELLING SPOUT

APPLICATION:

- Bench mounting

DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

CONTACT MATERIALS:

- PP RAL7032
- Ceramic

HEADWORK SEALING:

- CERAMIC temperature working range: 0-50°

CONNECTION TAP:


- Male thread G1/2" - Female G1/4"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

WEIGHT:

- 375 gr

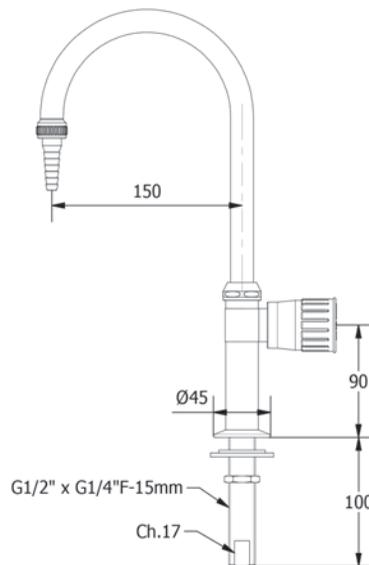

WARRANTY 2 YEARS

PURE WATER

11250.3PPR

PURE WATER PP COLUMN WITH REMOVABLE NOZZLE

APPLICATION:

- Bench mounting

DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

CONTACT MATERIALS:

- PP RAL7032
- Ceramic

HEADWORK SEALING:

- CERAMIC temperature working range: 0-50°

CONNECTION TAP:


- Male thread G3/4" - G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

WEIGHT:

- 588 gr

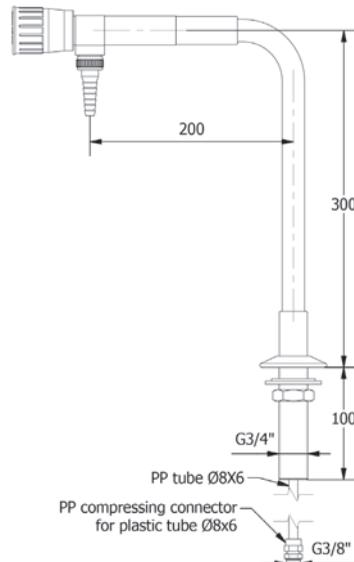

WARRANTY 2 YEARS

PURE WATER

11310.0PPR

REMOTE CONTROL FOR PURE WATER IN PP

APPLICATION:

- Wall mounting

DETAILS:

- Waterflow around 10l/min at 3 Bars pressure
- Test pressure: 6 Bars/air
- Max working pressure: 6 Bars

CONTACT MATERIALS:

- PP RAL7032

HEADWORK SEALING:


- CERAMIC temperature working range: 0-50°

CONNECTION TAP:

- Female thread G1/4" - Connector for tube $\varnothing 8 \times 6$

STANDARD AND NORMS:

- EN13792:2000
- DIN12918
- ISO228/1

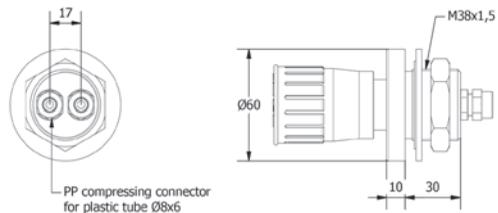

WEIGHT:

- 260 gr

WARRANTY 2 YEARS

PURE WATER

11321.2PPR

WALL MOUNTED PURE WATER PP SPOUT

APPLICATION:

- Wall mounting

CONTACT MATERIALS:

- PP RAL7032

CONNECTION TAP:


- Male thread G1/2" - Female G1/4"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- Laser printed medium on the rosetta

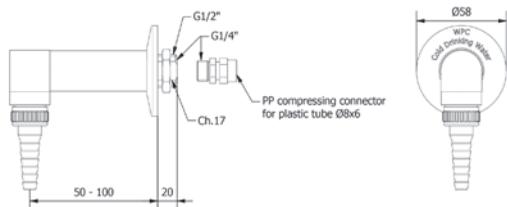

WEIGHT:

- 75 gr

WARRANTY 2 YEARS

PURE WATER

11323.2PPR

PURE WATER PP SWIVELLING SPOUT

APPLICATION:

- Wall mounting

CONTACT MATERIALS:

- PP RAL7032

CONNECTION TAP:


- Male thread G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:

- Laser printed medium on the rosetta

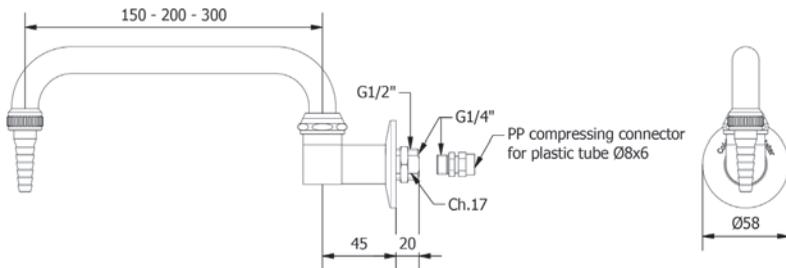

WEIGHT:

- 231 gr

WARRANTY 2 YEARS