



STEAM

STEAM

Legend

Codes indicated with numbers:

16xxx.1 supplied with G 3/8" coupling

16xxx.2 supplied with G 1/2" coupling

1. To require chemical nickel plating add NK to the article's code
ex. 16001.1NK

Technical Information

The steam taps are supplied with refined adjustment head valve, sealing in PTFE and O-rings in Viton, with a maximum operational temperature of 120° C.

Fixed nozzle in compliance with the DIN 12898 regulation.

Handles in compliance with the EN13792:2000 regulation and manufactured in acid-resistant PP.

Threads in compliance with the ISO228/1 regulation, B tolerance class.

Taps are built following the DIN 12918 norm.

Taps finished with acid-resistant epoxy powder painting.

STEAM

16000.1

STRAIGHT STEAM TAP

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:


- PTFE and Viton maximum working temperature: 120°

CONNECTION TAP:

- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

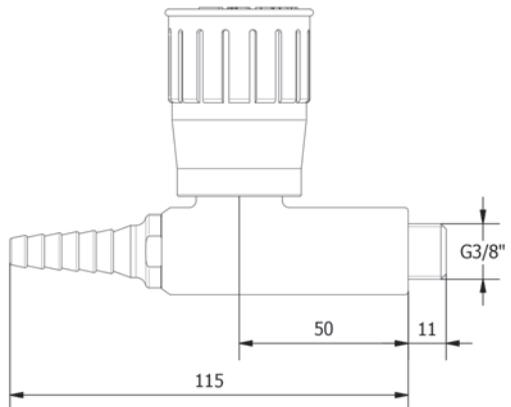

WEIGHT:

- 525 gr

WARRANTY 2 YEARS

STEAM

16001.1

STEAM TAP WITH 45° NOZZLE

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:


- PTFE and Viton maximum working temperature: 120°

CONNECTION TAP:

- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

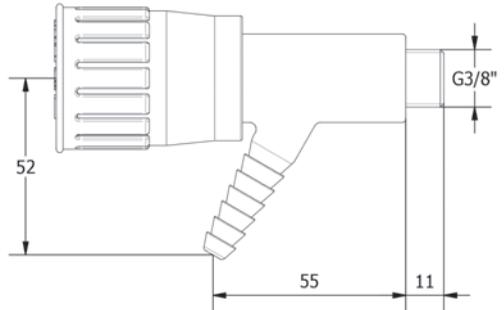

WEIGHT:

- 376 gr

WARRANTY 2 YEARS

STEAM

16002.1

WALL MOUNTED STEAM TAP 45° NOZZLE WITH INCLINED HANDLE

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:

- PTFE and Viton maximum working temperature: 120°

CONNECTION TAP:


- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

WEIGHT:

- 468 gr

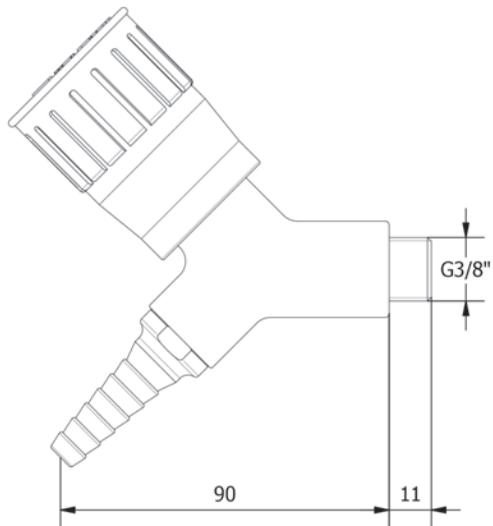

WARRANTY 2 YEARS

STEAM

16003.1

WALL MOUNTED 90° TAP FOR STEAM

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:


- PTFE and Viton maximum working temperature: 120°

CONNECTION TAP:

- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

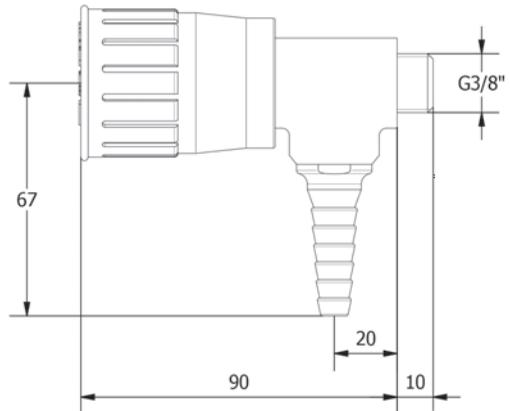

WEIGHT:

- 381 gr

WARRANTY 2 YEARS

STEAM

16300.0

STEAM FUME CUPBOARD REMOTE CONTROL FRONT MOUNTING

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:



- PTFE and Viton maximum working temperature: 120°

CONNECTION TAP:

- Copper tubes $\varnothing 10$ or $\varnothing 12$

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

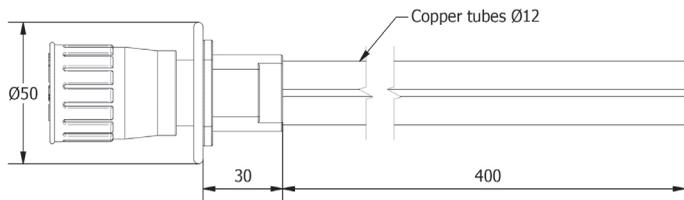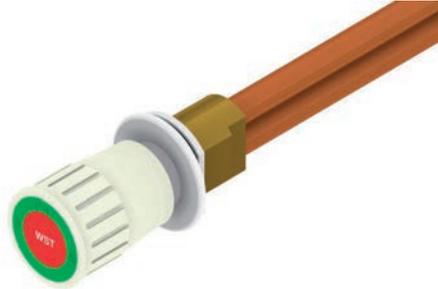

WEIGHT:

- 650 gr

WARRANTY 2 YEARS

STEAM

16310.0

STEAM FUME CUPBOARD REMOTE CONTROL

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:


- PTFE and Viton maximum working temperature: 120°

CONNECTION TAP:

- Copper tuber $\varnothing 10$ or $\varnothing 12$

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

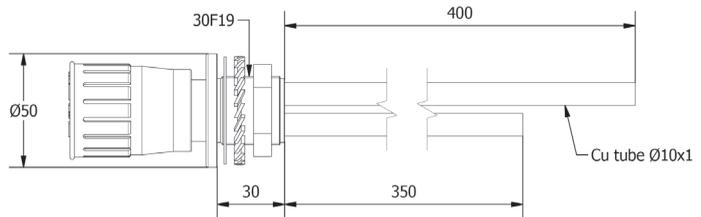

WEIGHT:

- 648 gr

WARRANTY 2 YEARS

STEAM

16310.0WC

STEAM FUME CUPBOARD REMOTE CONTROL

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:


- PTFE and Viton maximum working temperature: 120°

CONNECTION TAP:

- Female thread G1/4"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

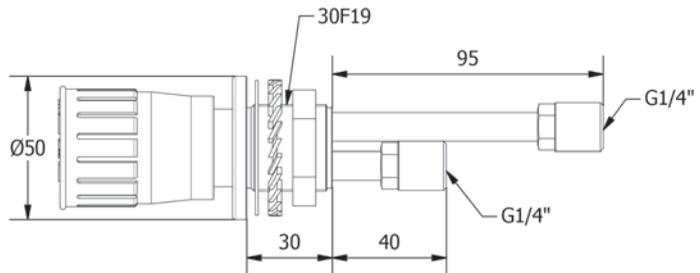

WEIGHT:

- 549 gr

WARRANTY 2 YEARS

STEAM

16320.1

STEAM 90° CONNECTION NOZZLE

APPLICATION:

- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:


- Brass
- O-ring in Viton

CONNECTION TAP:

- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

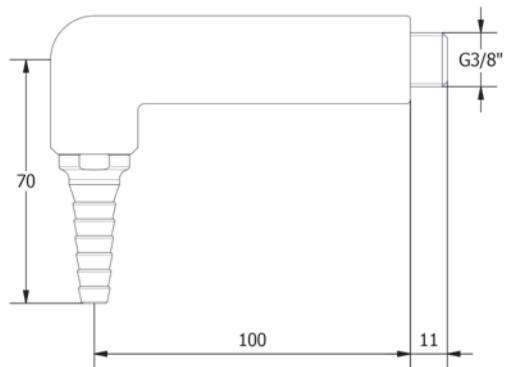

WEIGHT:

- 538 gr

WARRANTY 2 YEARS

STEAM

16321.1

STEAM 45° CONNECTION NOZZLE

APPLICATION:

- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:


- Brass
- Oring in Viton

CONNECTION TAP:

- Male thread G3/8"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

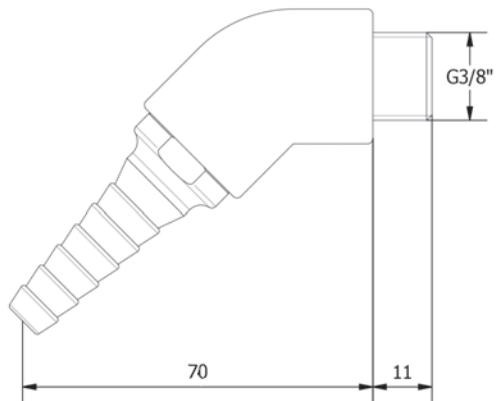

WEIGHT:

- 206 gr

WARRANTY 2 YEARS

STEAM

16323.1

STEAM BENCH 90° CONNECTION NOZZLE

APPLICATION:

- Bench mounting
- Wall mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:


- Brass
- Oring in Viton

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

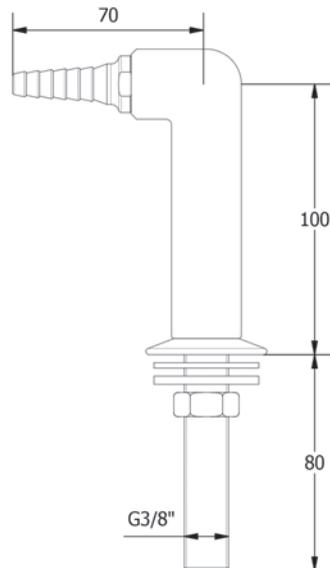

WEIGHT:

- 714 gr

WARRANTY 2 YEARS

STEAM

16324.1

STEAM 45° CONNECTION NOZZLE

APPLICATION:

- Bench mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:


- Brass
- Oring in Viton

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

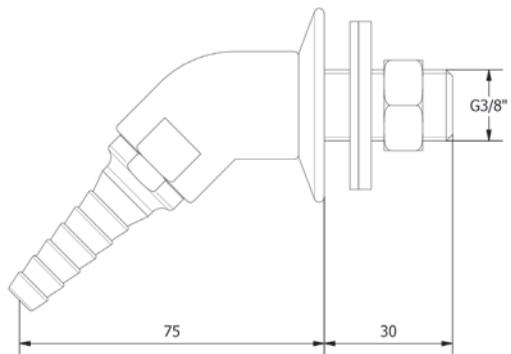

WEIGHT:

- 330 gr

WARRANTY 2 YEARS

STEAM

16324.1SG

STEAM 45° CONNECTION NOZZLE WITH PP ROSETTA AND CHEMICAL ABBREVIATION

APPLICATION:

- Bench mounting

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:


- Brass
- Oring in Viton

CONNECTION TAP:

- Male thread G3/8" or G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

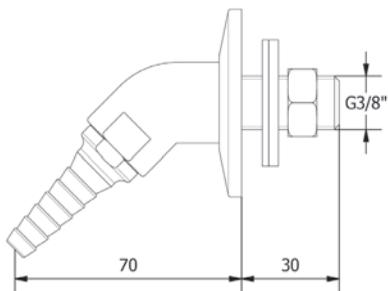

WEIGHT:

- 283 gr

WARRANTY 2 YEARS