


# KERN PFB 600-3

# KERN

Quick-display precision balance with user-friendly concept of operation mode - now also with checkweighing function

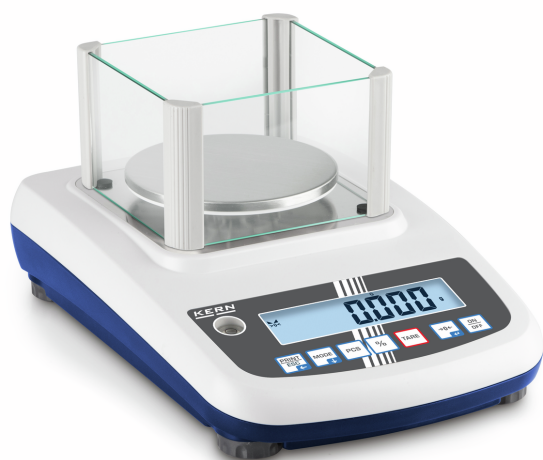

Possible calibration points	200 g; 400 g; 600 g
Stabilization time	6 s
Warm-up time	4 h
Eccentric loading at 1/3 [Max]	0,004 g
Maximum creep (15 minutes)	10 mg
Maximum creep (30 minutes)	20 mg

## Approval

CE mark	✓
---------	---

## Display

Display type	LCD
Display screen size	129 x 27
Display backlight	✓
Display digit height	21 mm
Languages of the user interface	Symbol language

## Construction

Dimension housing (W×D×H)	210×315×90 mm
Dimensions rectangular draught shield - inner (W×D×H)	140×150×65 mm
Dimensions rectangular draught shield - outer (W×D×H)	147×163×80 mm
Dimensions completely mounted (W×D×H)	210×315×160 mm
Material display housing	Plastics
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Material draught shield	glass
Dimensions weighing surface (Ø)	120 mm
Transport safety lock - bolt torque	0,1 Nm
Material load cell(s)	aluminium
Levelling feet adjustable	✓

## Functions

Number of keys for operation	7
	5 min
	2 min
Auto-off interval(s) in battery mode/rechargeable battery mode	1 min
	30 min
	60 min
	30 sec
Capacity - Display	✓
PreTare function	✓
Tare function	manual (single & multi)
Hold function	✓
Percentage determination	✓

## Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PFB

## Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	600 g
Readability [d]	0,001 g
Resolution	600.000
Linearity	± 0,005 g
Reproducibility	0,005 g
Default unit	g

Units	g
	gn
	dwt
	tl (Tw)
	tl (HK)
	ozt
	tl (Singap, Malays)
	ct
	mo
	lb
	oz
	ffa
tol	
m	

USP Minimum weight of sample (k = 2, U = 0.1%) 10 g

Adjustment options Adjusting with external weight

Recommended adjusting weight 600 g (E2)

# KERN PFB 600-3



Quick-display precision balance with user-friendly concept of operation mode - now also with checkweighing function

Counting function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Rez A (Net total)
Sum memory function	✓
Interfaces	RS-232 standard Bluetooth BTC (v2.0) (optional, factory) Bluetooth BLE (v4.0) (optional, factory)
IP protection - display	no IP protection
IP protection - load cell	IP65

## Counting

Smallest piece weight when piece counting - laboratory conditions	2 mg
Smallest piece weight when piece counting - normal conditions	20 mg
Counting reference weight can be entered	✓
Reference quantity	5, 10, 20, 50, free, Input
Counting resolution (laboratory conditions)	300.000

## Power Supply

Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	12 V, 500 mA
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	EURO AUS UK US CH
Rechargeable battery optional	Rchrg. battery optional (factory)
Rechargeable battery charging time	6,5 h
Rechargeable battery operating time - backlight on	36 h
Rechargeable battery operating time - backlight off	72 h

Battery / accumulator type	Li-Ion
Battery connection	2-pole tub connector

## Environmental conditions

Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %
Ambient temperature [Min]	15 °C
Ambient temperature [Max]	30 °C
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

## Packing & Shipping

Readability force [d] (N)	1 d
Dimensions packaging (W×D×H)	380×280×280 mm
Net weight	1,245 kg
Shipping method	Parcel service
Net weight approx.	1,4 kg
Gross weight approx.	2,6 kg
Shipping weight	6 kg

## Services (optional)

Article number for DAkkS calibration	963-103
Article number for certificate of conformity (verification)	969-517

## Pictograms

### STANDARD



### OPTION



### FACTORY

